


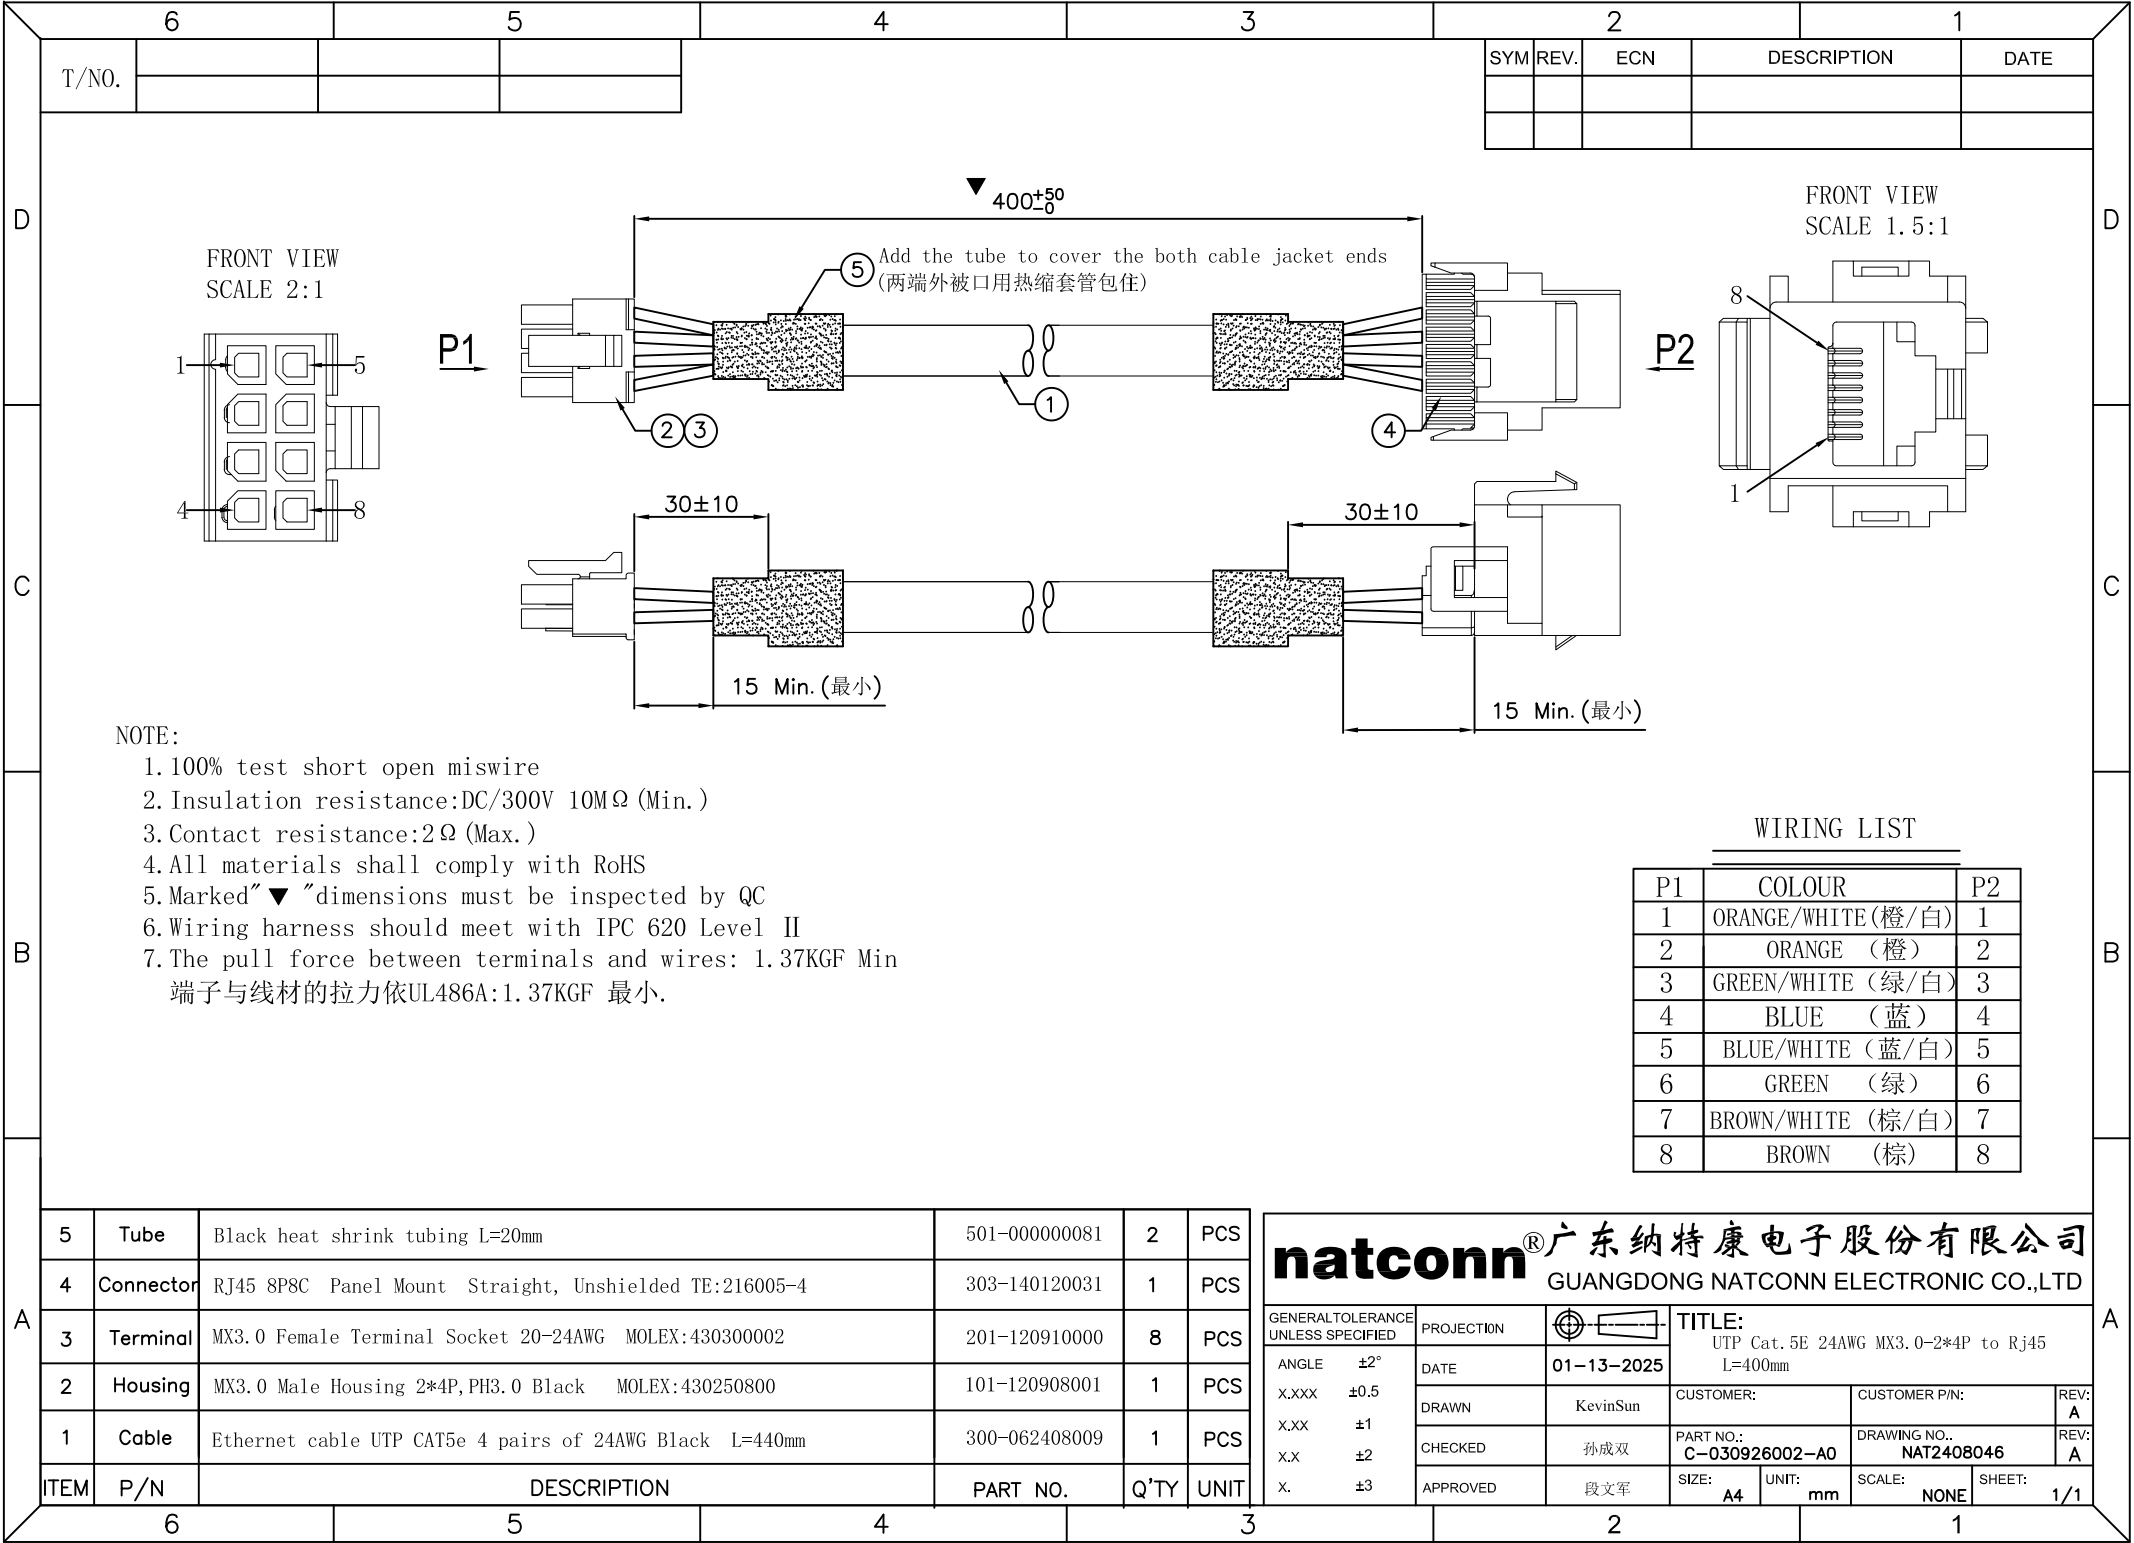

NOTE:

- 1.100% test short open miswire
 - 2. Insulation resistance:DC/300V 10MΩ (Min.)
 - 3.Contact resistance:2Ω (Max.)
 - 4.All materials shall comply with RoHS
 - 5.Marked"▼"dimensions must be inspected by QC
 - 6.Wiring harness should meet with IPC 620 Level II
 - 7.The pull force between terminals and wires: 1.37KGF Min
- 端子与线材的拉力依UL486A:1.37KGF 最小.

WIRING LIST

P1	COLOUR	P2
1	ORANGE/WHITE (橙/白)	1
2	ORANGE (橙)	2
3	GREEN/WHITE (绿/白)	3
4	BLUE (蓝)	4
5	BLUE/WHITE (蓝/白)	5
6	GREEN (绿)	6
7	BROWN/WHITE (棕/白)	7
8	BROWN (棕)	8

5	Tube	Black heat shrink tubing L=20mm	501-000000081	2	PCS
4	Connector	RJ45 8P8C Panel Mount Straight, Unshielded TE:216005-4	303-140120031	1	PCS
3	Terminal	MX3.0 Female Terminal Socket 20-24AWG MOLEX:430300002	201-120910000	8	PCS
2	Housing	MX3.0 Male Housing 2*4P, PH3.0 Black MOLEX:430250800	101-120908001	1	PCS
1	Cable	Ethernet cable UTP CAT5e 4 pairs of 24AWG Black L=440mm	300-062408009	1	PCS
ITEM	P/N	DESCRIPTION	PART NO.	Q'TY	UNIT

natconn®广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

GENERAL TOLERANCE UNLESS SPECIFIED		PROJECTION	TITLE:		
ANGLE	±2°	DATE	UTP Cat. 5E 24AWG MX3.0-2*4P to RJ45 L=400mm		
X.XXX	±0.5	DRAWN	KevinSun	CUSTOMER:	CUSTOMER P/N:
X.XX	±1	CHECKED	孙成双	PART NO.:	DRAWING NO.:
X.X	±2	APPROVED	段文军	C-030926002-A0	NAT2408046
X.	±3			SIZE: A4	UNIT: mm
				SCALE: NONE	SHEET: 1/1