




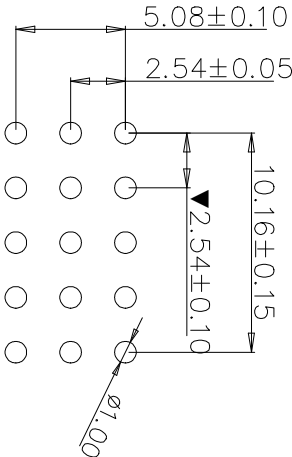

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

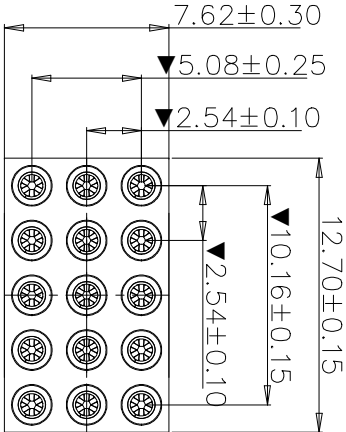

Recommended P.C.B
Layout(±0.05)

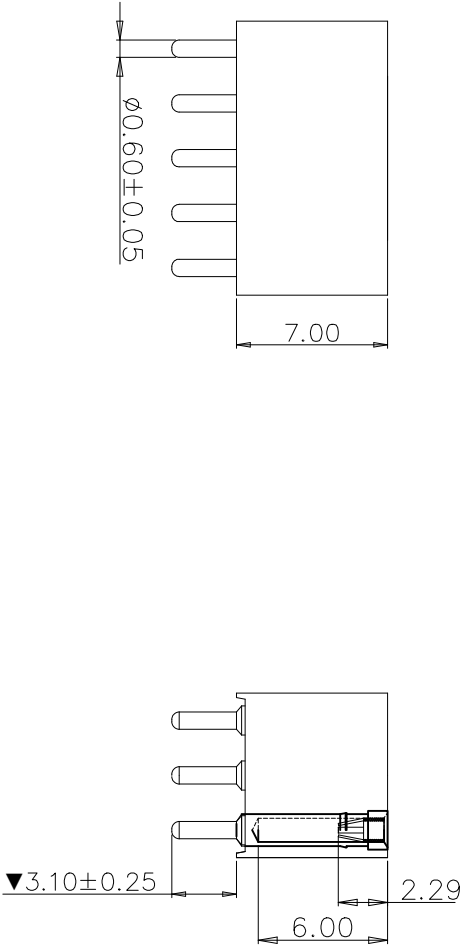

Ordering information

SHA - NNN T - I P P 1000A

No. of Positions	Insulator T type code T Triple Row	Pin Plating code	Clip Plating code
1	Tin150μ"	1 Tin150μ"	1 Tin150μ"
2	Tin200μ"	2 Tin200μ"	2 Tin200μ"
3	GF	3 GF	3 GF
4	Gold2μ"	4 Gold2μ"	4 Gold2μ"
5	Gold3μ"	5 Gold3μ"	5 Gold3μ"
6	Gold10μ"	6 Gold10μ"	6 Gold10μ"
7	Gold15μ"	7 Gold15μ"	7 Gold15μ"
S	Special	S Special	S Special

natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:		PROJECTION	TITLE:
ANGLE ±2°		DATE	Pitch 2.54mm Triple Row Sockets Pin Length 10.00mm
X.XXX ±0.05		DRAWN	CUSTOMER:
X.XX ±0.25		CHECKED	PART NO.:
X.X ±0.35		APPROVED	SIZE: A4
X. ±0.50			UNIT: mm
			SCALE: 1:1
			SHEET: 1/1