






REVISION DATA			
SYM	ECN	DESCRIPTION	DATE
B		更新图面	
2024.3.12		莫健勇	

技术指标:

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
- 温度范围 -25° C~85° C.
Working temp: -25° C~85° C.
- 额定电压 50V, AC/DC.
Voltage rating: 50V AC/DC (rms)
- 接触电阻 ≤ 40mΩ
Contact resistance: 40mΩ max.
- 绝缘电阻: ≥ 100MΩ
Insulation resistance: 100MΩ min
- 额定电流: 1A, AC/DC
Current rating: 1A AC/DC
- 耐电压: AC 500V/1分钟
Withstanding Voltage: 500V AC/minute
- PIN保持力 0.5N/pin min
pin Retention force: 0.5N/pin min
- 主体材料: PA6T, 本色
Housing material PA6T, 本色
- 端子材: 黄铜(C2680, 镀镍40u", 镀金0.8u"
Terminal materl: Brass(C2680, plating Ni 40u", GF 0.8u"
- 焊片材料: 黄铜(C2680, 镀镍40u", 镀金0.8u"
Solder tab material: Brass (C2680, plating Ni 40u", GF 0.8u"

TABLE:

PIN	Dimension mm	
	A	B
2	1.25	7.65
3	2.50	8.90
4	3.75	10.15
5	5.00	11.30
6	6.25	12.65
7	7.50	13.90
8	8.75	15.15
9	10.00	16.40
10	11.25	17.65
11	12.50	18.90
12	13.75	20.15
13	15.00	21.40
14	16.25	22.65
15	17.50	23.90
20	23.75	30.15
30	36.25	42.65

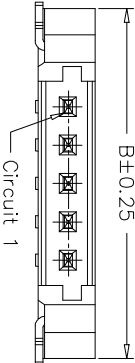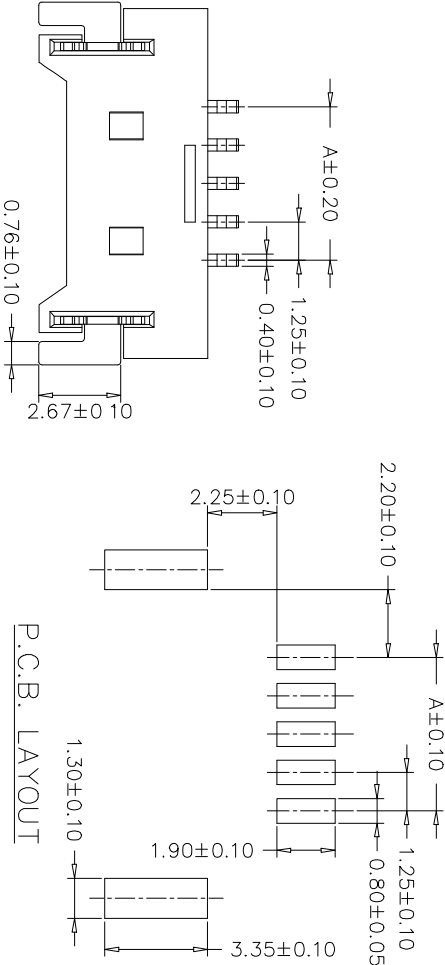

W DD1

XX

A

X

X

X


15

natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ±2°

PROJECTION



TITLE:

L. 25mm Crimp Style connectors

Position No.
02 to 30

Connector Type
A: Crimp Type

Insulation material
C BK-PA6T
G BK-PA6T
S Special

Contact Plating
A G/F
B Au3u"
C Au5u"
D Au10u"
F Au15u"
S Sn120u"
Z Special

Insulator Color
0 Black
1 White
2 Nature
3 Red
4 Yellow
S Special

Serial No.
01-99

DATE

2024.3.12

DRAWN

莫健勇

CUSTOMER:

N/A

REV: N/A

CHECKED

郑双平

PART NO.:

REV: B

APPROVED

冯显东

SIZE:

A4

UNIT:

mm

SCALE:

2:1

SHEET:

1/1