

CUSTOMER COPY

6

5

4

3

2

1



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Material:

Contact material:brass

Contact plating:see ordering information

Solder tab:brass,tin plated

Insulator material:Thermoplastic(NY46),UL94V-0

Electrical:

Current rating:1A AC/DC

Contact resistance: $\leq 20\text{m}\Omega$ /contact

Insulation resistance: $\geq 100\text{M}\Omega$






Voltage rating:125V AC/DC

Withstanding voltage:500V AC/minute

Mechanical:

Temperatures range: -25°C to $+85^{\circ}\text{C}$

Critical Dimensions:▼

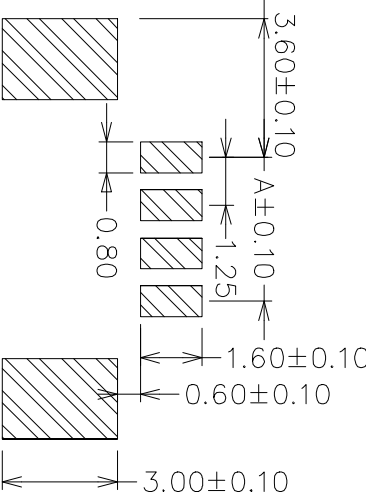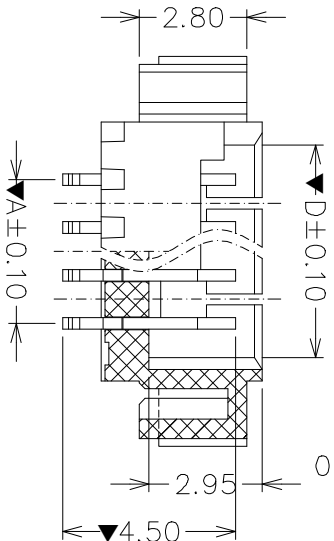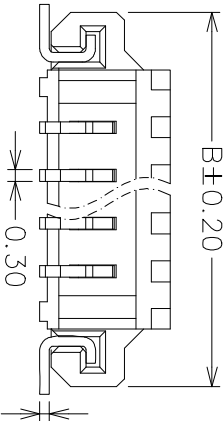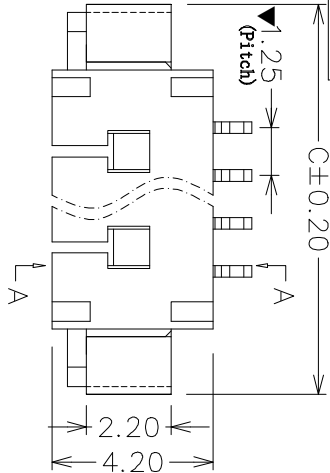

RECOMMENDED P.C.B LAYOUT

natconn®

广东纳特康电子股份有限公司

GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE $\pm 2^{\circ}$

PROJECTION



TITLE:

DATE 2015/05/22

1.25 Pitch SMT Wafer

DRAWN

雷邦军

CUSTOMER:

N/A

CHECKED

唐建平

PART NO.:

WDD1XX-AXS1-03

APPROVED

冯显东

SIZE:

A4

UNIT:

mm

SCALE:

1:1

SHEET:

1/1

W X X X XX - X X - 03

Pitch

C 1.00mm

D 1.25mm

E 1.50mm

F 2.00mm

G 2.50mm

H 2.54mm

Versions

A 180°

B 90°

D SMT

Row Option

1 Single Row

2 Dual Row

Position No.

02 to 20

Connector Type

A: A Type

B: B Type

Insulation material

B BK-PA66

C BK-PA6T

D BK-PA46

F BK-LCP

S Special

Contact Plating

A C/F

B Au3 "

C Au5 "

D Au10 "

H GF/Sn120 "

S Sn120 "

Insulator Color

0 Black

1 White

S Special

Serial No.

01-99

6

5

4

3

2

1