

CUSTOMER COPY



REVISION DATA






SYM	ECN	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 1A,AC,DC(AWG#26)
- Withstanding voltage: 500V AC/minute
- Insulation resistance: 100MΩ min.
- Temperatures range:-40°C~+85°C
- Contact resistance: ≤20mΩ max

WAFER

- Poles:2-16
- Material:Nylon 46, UL94V-0
- Contact : Brass,Tin plated
- Q'TY: 1000 pcs/bag
- Critical dimensions:▼

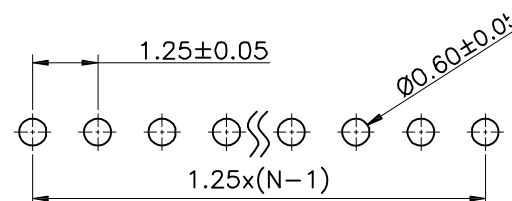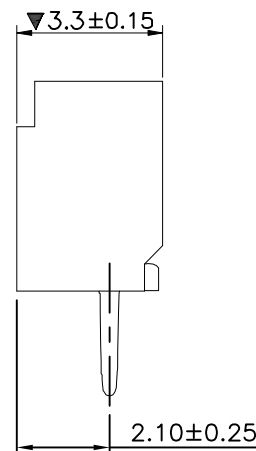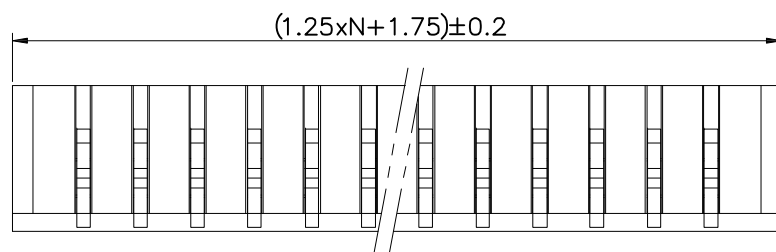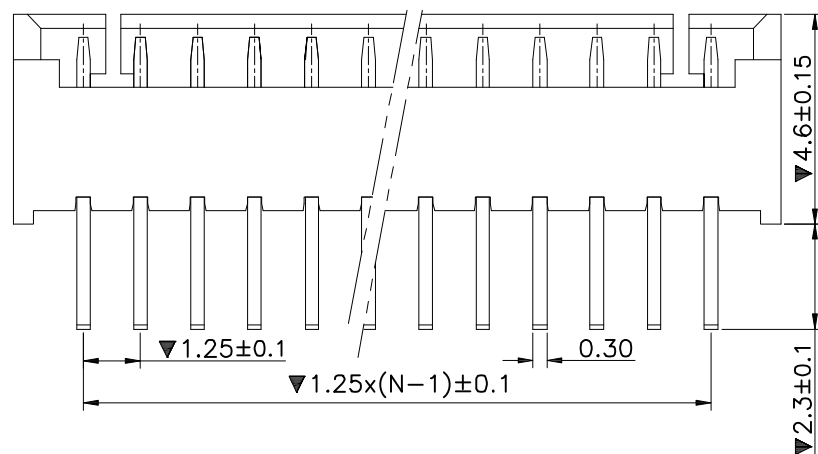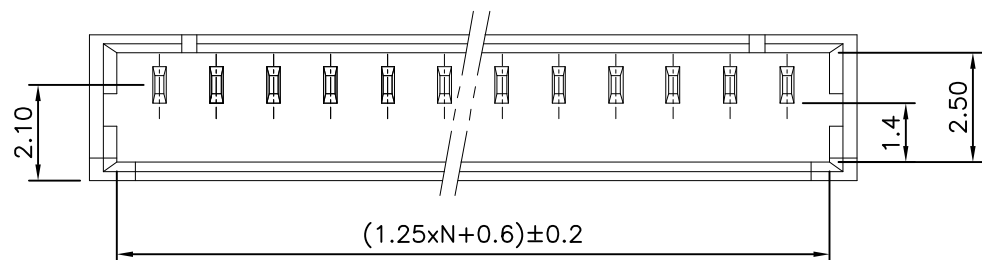

Recommended P.C.B Layout

W	D	A	1	XX	A	X	X	X	01
Pitch C 1.00mm D 1.25mm E 1.50mm F 2.00mm G 2.50mm H 2.54mm	180° 90° SMT	Row Option 1 Single Row 2 Dual Row	Position No. 02 to 15	Contact Plating A G/F C Au5μ" D Au10μ" H GF/Sn120μ" S Sn120μ" Z Special	Insulator Material A PBT B PA66 C PA6T D PA46 E PPS F LCP Z Other	Insulator Color 0 Black 1 White 5 Green S Special	Serial No. 01-99		

Packing

- 1.General
- 2.Tape&Reel
- 3.Tube
- 4.Tray
- 5.Other

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:		
ANGLE ±2°	DATE	2015/04/01	MX1.25 180° WAFER	
X.XXX ±0.05	DRAWN	邹丽婷	CUSTOMER: N/A	CUSTOMER P/N: N/A
X.XX ±0.20	CHECKED	于松	PART NO.:	DRAWING NO.: WDA1XXAXXX01
X.X ±0.30	APPROVED	张丰志	SIZE: A4	UNIT: mm
X. ±0.50			SCALE: 1:1	SHEET: 1/1