




SYM	ECN	DESCRIPTION	DATE	APPROVED

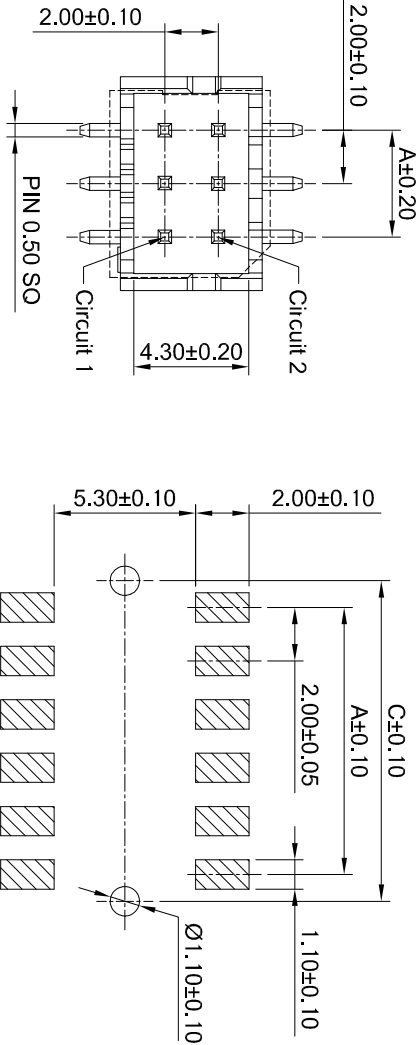


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/infinite
Pin Material: Brass/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Dimensions(mm)		
	A	B	C	A	B	C
2x2P	2.00	6.00	4.00	2x12P	22.00	26.00
2x3P	4.00	8.00	6.00	2x13P	24.00	28.00
2x4P	6.00	10.00	8.00	2x14P	26.00	30.00
2x5P	8.00	12.00	10.00	2x15P	28.00	32.00
2x6P	10.00	14.00	12.00	2x16P	30.00	34.00
2x7P	12.00	16.00	14.00	2x17P	32.00	36.00
2x8P	14.00	18.00	16.00	2x18P	34.00	38.00
2x9P	16.00	20.00	18.00	2x19P	36.00	40.00
2x10P	18.00	22.00	20.00	2x20P	38.00	42.00
2x11P	20.00	24.00	22.00			

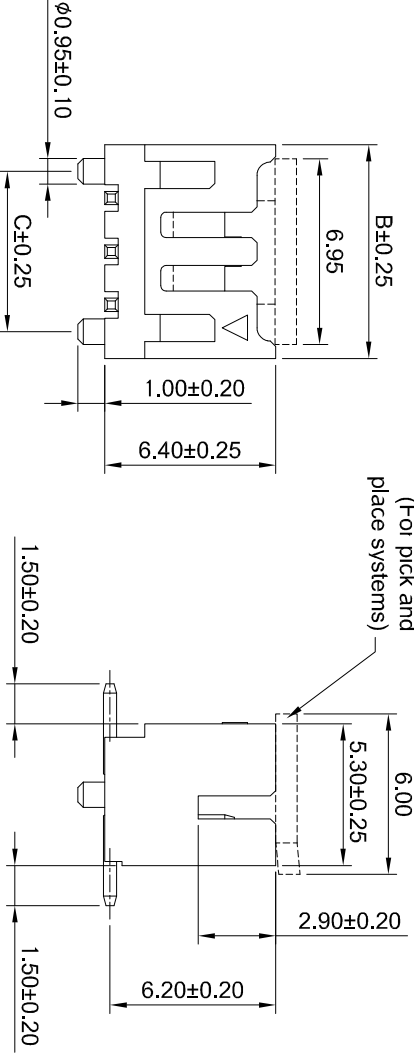

Ordering information

WFD2XX - B XX T 12 X

No. of Pins

Contact Plating
01=Tin
02=Gold Flash

Color
A=Black
B=Beige
D=White

Packing

1.General	√
2.Tape&Reel	
3.Tube	
4.Tray	
5.Other	

natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°	PROJECTION: DATE 2023.8.11	TITLE: 2.0mm PITCH 180° DUAL ROW WAFER -SMT YTYPE
----------------------	----------------------------	---

CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
DRAWN	PART NO.: WFD2-BT12	REV: A
CHECKED	SIZE: A4	UNIT: mm
APPROVED	SCALE: 1:1	SHEET: 1/1