

P

6

5

4

3



2

1

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

D

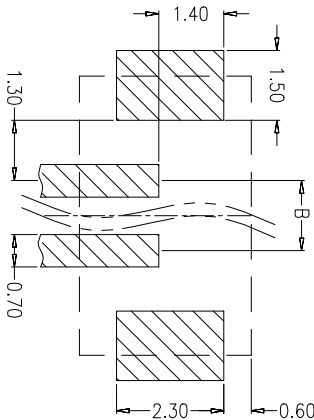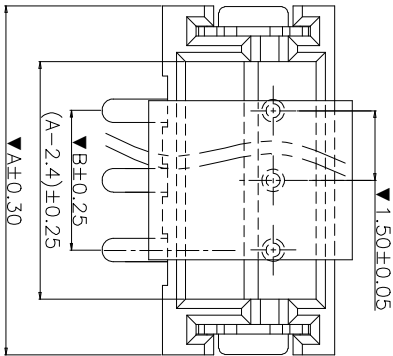




Recommended P. C. B Layout

NOTES:

Current Rating: 1A AC, DC
Voltage Rating: 100V AC, DC
Temperature Range: -25° C +85° C
Contact Resistance: 20m max
Insulation Resistance: 500M min
Withstanding Voltage: 500V AC/minute
Critical Dimensions: ▼

C

C

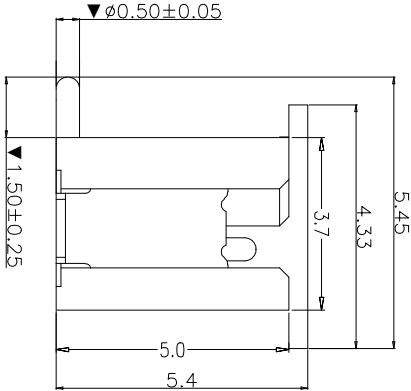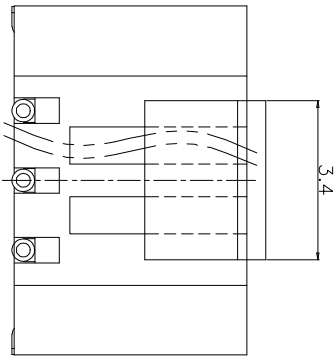

B

B

Pin NO.	Dimensions	
	A	B
02	6.00	1.50
03	7.50	3.00
04	9.00	4.50
05	10.50	6.00
06	12.00	7.50
07	13.50	9.00
08	15.00	10.50
09	16.50	12.00
10	18.00	13.50
11	19.50	15.00
12	21.00	16.50

WED1XX - B XX T 07 X

No. of Pins
02~12

Contact Plating
01= Tin
02= Gold Flash

COLOR
A= BLACK
D= WHITE

A

A

Packing		natconn® 广东纳特康电子股份有限公司 GUANGDONG NATCONN ELECTRONIC CO.,LTD			
1.General					
2.Tape&Reel	√	TOLERANCE: ANGLE ±2°		PROJECTION	TITLE:
3.Tube		X.XXX	±0.05	DATE	2016/10/17
4.Tray		X.XX	±0.20	DRAWN	雷邦军
5.Other		X.X	±0.30	CHECKED	
		X.	±0.40	APPROVED	
		CUSTOMER: N/A		CUSTOMER P/N:	N/A
		PART NO.: WED1XX-B01T07X		DRAWING NO.:	WED1XX-B01T07X
		SIZE: A4	UNIT: mm	SCALE: 1:1	SHEET: 1/1

6

5

4

3

2

1