

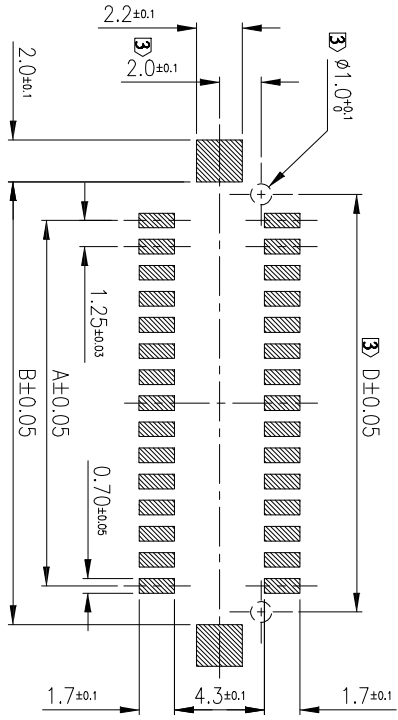


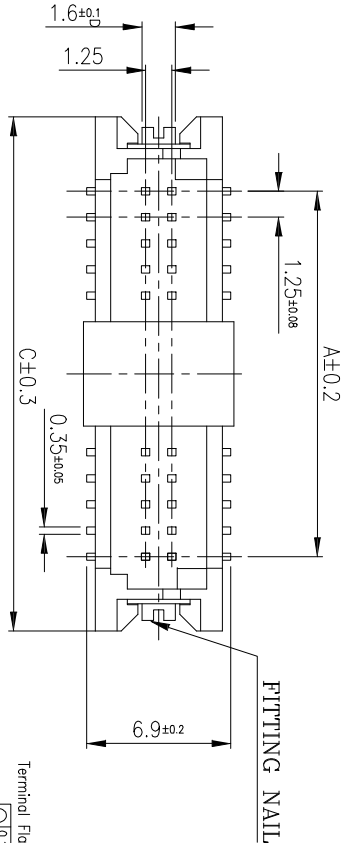




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

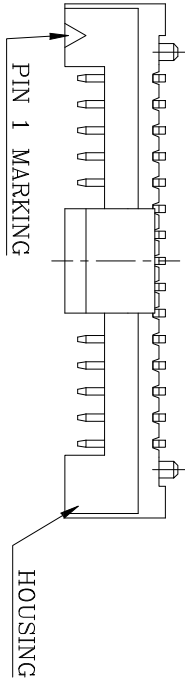

NOTES:

1. MATERIAL:
1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.U194V-0;
COLOR:NATURAL OR BLACK. 无铅PA6T
- 1.2 CONTACT: BRASS
- 1.3 FITTING NAIL: BRASS
- 1.4 VACUUM COVER:THERMOPLASTIC, HIGH TEMP.U194V-0;
COLOR:NATURAL OR BLACK.
2. PLATING PER ACES PLATING CODE(P/N LEGEND)
3. DIMENSION FOR W/H BOSS
4. REFLOW SOLDER CAPABLE TO 260C

Y-Y SECTION

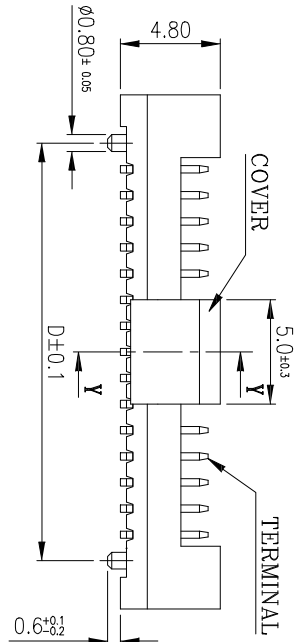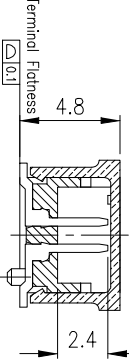

CKT	D1MA	D1MB	D1MC	D1MD
10	5.00	8.7	12.3	7.5
12	6.25	9.95	13.35	8.75
14	7.5	11.2	14.6	10.00
16	8.75	12.45	15.85	11.25
20	11.25	14.95	18.65	13.75
30	17.5	21.20	24.8	20.00
40	23.75	27.45	31.10	26.25

natconn[®]

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD



TITLE: 1.25 Pitch SMT Wafer

TOLERANCE: ANGLE ±2°		PROJECTION		DATE		CUSTOMER:		CUSTOMER P/N:		REV:	
X.XXX	±0.05	DRAWN	雷邦军	2015/05/26		N/A		N/A		N/A	
X.XX	±0.20	CHECKED	唐建平								
X.X	±0.30	APPROVED	冯显东								
X.	±0.50										

W D D 2 XX - A X X - 21

Pitch
C 1.00mm
D 1.25mm
E 1.50mm
F 2.00mm
G 2.50mm
H 2.54mm

Versions
A 180°
B 90°
D SMT

Row Option
1 Single Row
2 Dual Row

Position No.
02 to 20

Connector Type
A: A Type
B: B Type

Insulation material
B BK-PA66
C BK-PA6T
D BK-PA46
F BK-LCP
S Special

Contact Plating
A C/F
B Au3 "
C Au5 "
D Au10 "
H GF/Sn120 "
S Sn120 "
Z Special

Insulator Color
0 Black
1 White
S Special

Serial No.
01-99