

CUSTOMER COPY

RoHS
compliant

REVISION DATA



SYM	ECN	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

- Voltage rating. 250V AC,DC
- Current rating. 1A, AC, DC (AWG#26)
- Withstanding voltage. 500V AC/minute
- Insulation resistance.100M Ω min
- Temperature range.-40℃ - +85℃
- Contact resistance.20m Ω max

WAFER

- Poles.2-16
- Material.Nylon 46, UL94V-2
- Contact. Brass, Tin plated
- Q' TY. 1,000 pcs/bag
- Critical Dimensions:▼

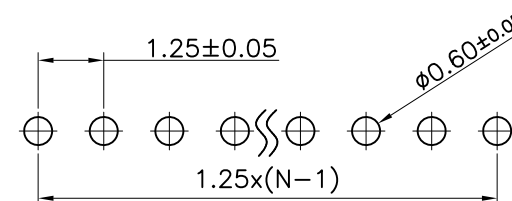

Recommended P.C.B Layout

W	D	B	1	XX	A	X	X	X	02
Pitch C 1.00mm D 1.25mm E 1.50mm F 2.00mm G 2.50mm H 2.54mm	Versions A 180° B 90° C SMT	Row Option 1 Single Row 2 Dual Row	Position No. 02 to 16	Contact Plating A G/F C Au5 μ " D Au10 μ " H G/F/Sn120 μ " S Sn120 μ " Z Special	Insulator Material A PBT B PA66 C PA6T D PA46 E PPS F LCP Z Other	Insulator Color 0 Black 1 White 4 BEIGE S Special	Serial No. 01-99		

Packing

1.General

√

2.Tape&Reel

3.Tube

4.Tray

5.Other

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:			
ANGLE $\pm 2^\circ$	DATE	04-11-2011	MX1.25 90° WAFER		
X.XXX ± 0.05	DRAWN	Huochangyuan	CUSTOMER: na	CUSTOMER P/N: na	REV: na
X.XX ± 0.25	CHECKED	唐建平	PART NO.:		DRAWING NO.: WDB1XXAXXX02
X.X ± 0.35	APPROVED	冯显东	SIZE: A4	UNIT: mm	SCALE: 1: 1
X. ± 0.50					SHEET: 1/1