CUSTOMER COPY

RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

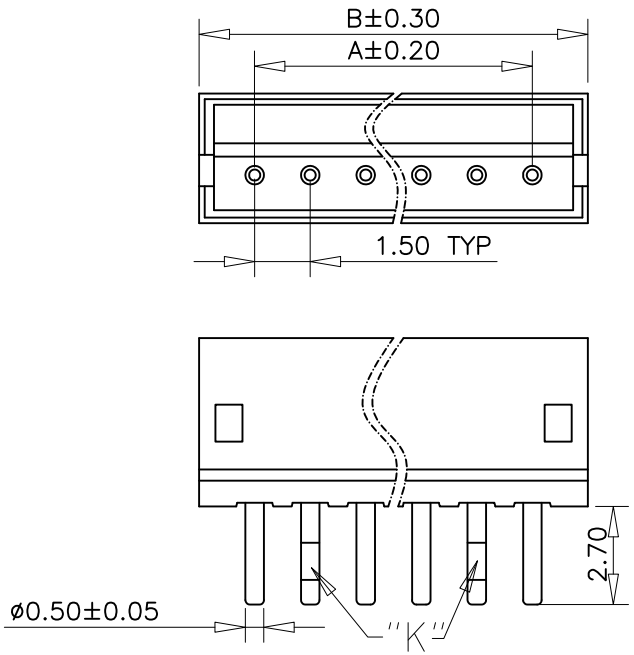

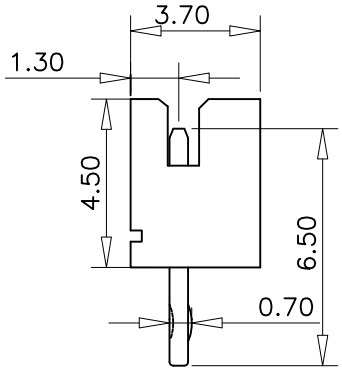

Technical Data
1.Material:
1.1 Contact:brass,tin plating
1.2 Insulator:PA66,UL94V-2,RoHS
2.Electrical:
2.1 Current rating:2A/contact AC,DC max.
2.2 Voltage rating:250V AC,DC
2.3 Contact resistance: ≤10mΩ/contact
2.4 Insulation resistance: ≥1000MΩ at V=100V
2.5 Dielectric strength:800V/min.
3.Mechanical:
3.1 Operating temperature: -25°C to+85°C
4.Critical Dimensions:▼

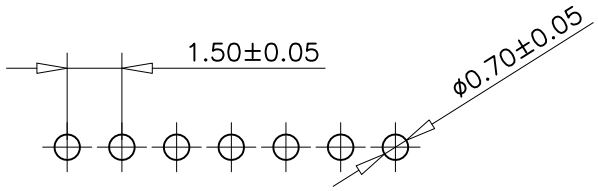

Poles	A	B	Poles	A	B
	DIM:(mm)			DIM:(mm)	
7	9.00	12.00	13	18.00	21.00
6	7.50	10.50	12	16.50	19.50
5	6.00	9.00	11	15.00	18.00
4	4.50	7.50	10	13.50	16.50
3	3.00	6.00	9	12.00	15.00
2	1.50	4.50	8	10.50	13.50

Ordering information

WEA1XX – X XX T 02 X

- WEA1XX: No. of Pins
- XX: Contact Plating
  - 01=Tin
  - 02=Gold Flash
- X: COLOR
  - A=BLACK
  - B=GREY
  - D=WHITE

Packing	
1.General	
2.Tape&Reel	
3.Tube	√
4.Tray	
5.Other	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION		TITLE: 1.50 Wafer Straight "K" Type		
ANGLE ±2°	DATE	2014/09/04			
X.XXX ±0.01	DRAWN	邹丽婷	CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
X.XX ±0.25	CHECKED	于松	PART NO.:	DRAWING NO.: WEA-A-XXAXXX-02	REV: A
X.X ±0.35	APPROVED	张丰志	SIZE: A4 / UNIT: mm	SCALE: 1:1	SHEET: 1/1
X. ±0.50					