



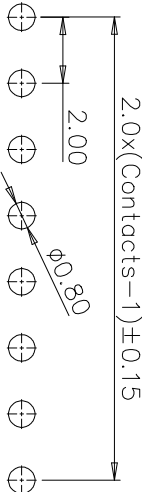

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

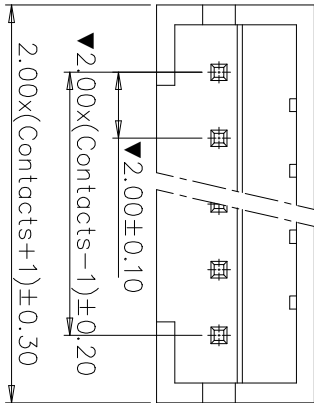

Recommended P.C.B
Layout(±0.05)

Technical Data

Material:

Contact material:brass

Contact plating:see ordering information

Insulator material:Thermoplastic,UL94V-2

Electrical:

Current rating:2A AC/DC

Contact resistance:≤20mΩ/contact

Insulation resistance:≥1000MΩ

Voltage rating:100V AC/DC



Withstanding voltage:800V AC/minute

Mechanical:

Temperatures range:-25°C to +85°C

Soldering temperature:245°C±5° 5S

Critical Dimensions:▼

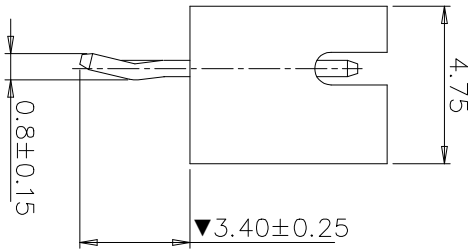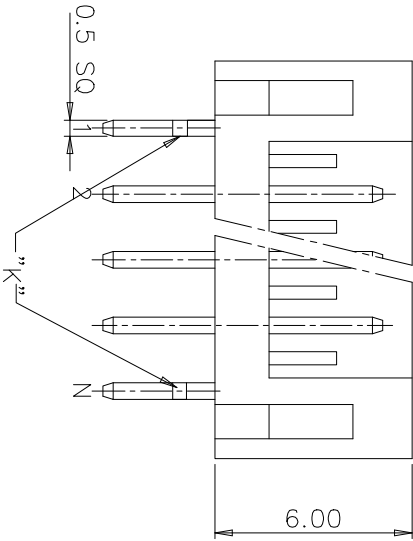

Ordering information


WFA1XX - A XX T 02 X

No. of Pins
2-16P

Contact Plating
01=Tin
02=Gold Flash

COLOR

A=BLACK
D=WHITE

Packing		natconn® 广东纳特康电子股份有限公司											
1.General		√	GUANGDONG NATCONN ELECTRONIC CO.,LTD										
2.Tape&Reel			TOLERANCE:		PROJECTION		TITLE:		2.00mm Pitch Wafer 180° 打K				
3.Tube			ANGLE ±2°		DATE				CUSTOMER:		CUSTOMER P/N:	REV:	
4.Tray			X.XXX ±0.05		DRAWN		唐建平		N/A		N/A	N/A	
			X.XX ±0.20		CHECKED		于松		PART NO.:		DRAWING NO.:	REV:	
			X.XX ±0.30		APPROVED		张丰志		SIZE:		UNIT:		
5.Other			X. ±0.50						A4		mm	SCALE: 1:1	SHEET: 1/1