

P

6

5

4

3

2

1

P

6

5

4





3

2

1



REVISION DATA			
SYM	ECN	DESCRIPTION	DATE

DATE	APPROVED

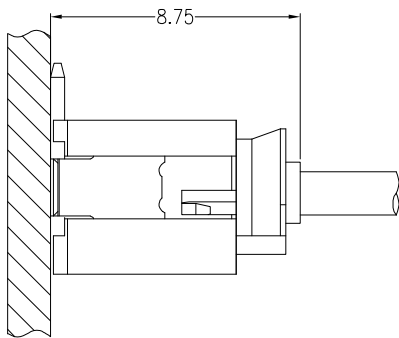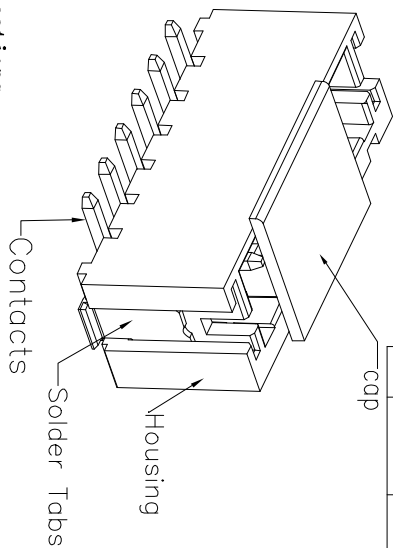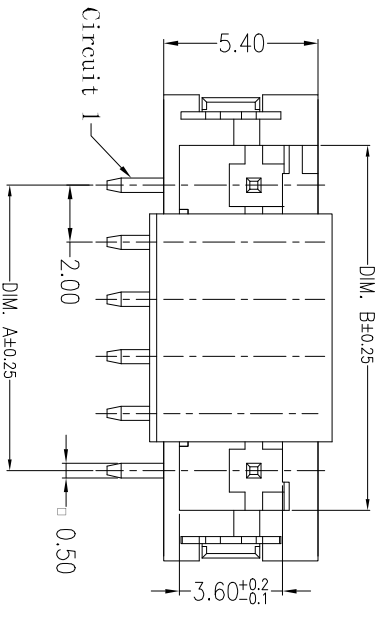

主要技术参数 Main Specifications

线 数 (Poles) : 02 to 16
接触电阻 (Contact resistance) : $\leq 20m\Omega$
绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
额定电压 (Rated voltage) : 250V AC DC
额定电流 (Rated current) : 2.0A AC DC
耐 电 压 (Withstand Voltage) : 1000V AC/minute
温度范围 (Temperature Range) : $-25^{\circ}C \sim +105^{\circ}C$

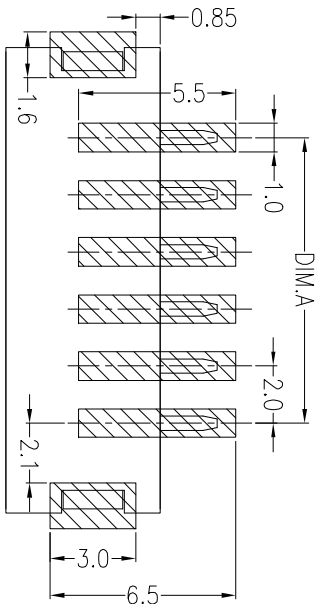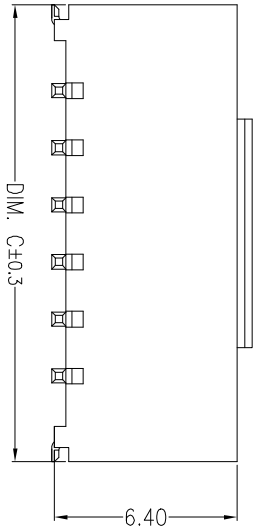

SUGGESTED PCB LAYOUT

Dimensions(mm)			
Circuits	DIM. A	DIM. B	DIM. C
02	2.00	4.80	8.00
03	4.00	6.80	10.00
04	6.00	8.80	12.00
05	8.00	10.80	14.00
06	10.00	12.80	16.00
07	12.00	14.80	18.00
08	14.00	16.80	20.00
09	16.00	18.80	22.00
10	18.00	20.80	24.00
11	20.00	22.80	26.00
12	22.00	24.80	28.00
13	24.00	26.80	30.00
14	26.00	28.80	32.00
15	28.00	30.80	34.00
16	30.00	32.80	36.00

Ordering information

WFD1XX - B XX T 12 X
T T T T T

No. of Pins Contact Plating Color
02-16 01=Tin A=Black
 02=Gold Flash B=Beige
 D=White

Packing		TITLE:			
1.General		natconn® 广东纳特康电子股份有限公司			
		GUANGDONG NATCONN ELECTRONIC CO.,LTD			
2.Tape&Reel	√	TOLERANCE: $\pm 2^{\circ}$	PROJECTION	Pitch2.0mm wafer SMT type	
3.Tube		ANGLE $\pm 2^{\circ}$	DATE	2020/01/08	
4.Tray		X.XXX ± 0.05	DRAWN	ZW	
5.Other		X.XX ± 0.20	CHECKED		
		X.X ± 0.30	APPROVED		
		X. ± 0.40		SIZE: A4	UNIT: mm
				SCALE: 1:1	SHEET: 1/1