



CUSTOMER COPY

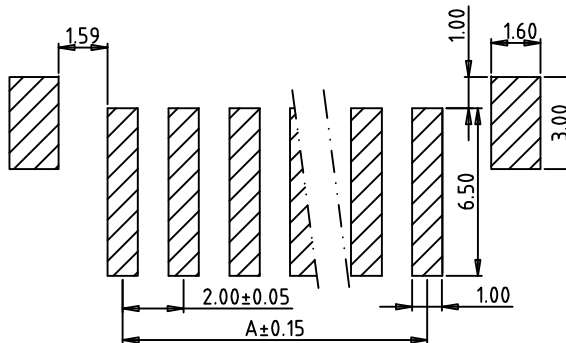

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

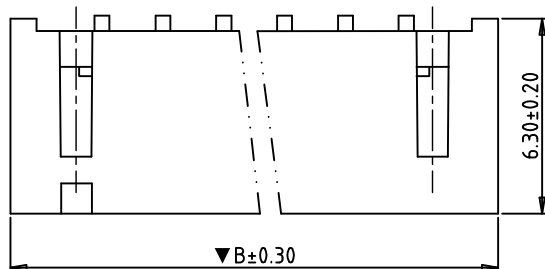

Recommended P.C.B
Layout(±0.05)

Technical Data

Material:

Contact material:brass

Contact plating:see ordering information

Solder tab:phosphor bronze,tin plated

Insulator material:High temperature nylon,UL94V-0

Electrical:

Current rating:2A AC/DC

Contact resistance:≤10mΩ/contact

Insulation resistance:≥1000MΩ



Voltage rating:100V AC/DC

Withstanding voltage:800V AC/minute

Mechanical:

Temperatures range:-25°C to +85°C

Critical Dimensions:▼

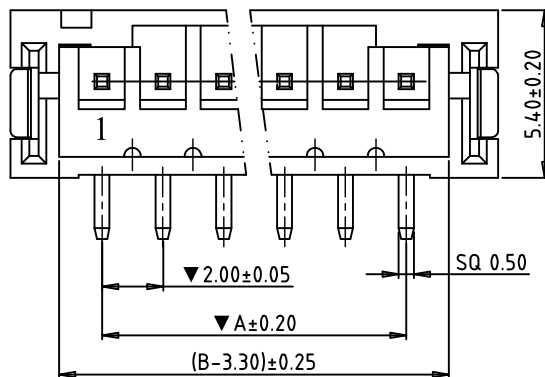

No. of Pins	Dimensions		No. of Pins	Dimensions	
	A	B		A	B
02P	2.00	8.00	10P	18.00	24.00
03P	4.00	10.00	11P	20.00	26.00
04P	6.00	12.00	12P	22.00	28.00
05P	8.00	14.00	13P	24.00	30.00
06P	10.00	16.00	14P	26.00	32.00
07P	12.00	18.00	15P	28.00	34.00
08P	14.00	20.00	16P	30.00	36.00
09P	16.00	22.00			

Ordering information

WFD1XX - A XX T 02 X

No. of Pins
02-20

Contact Plating
01=Tin
02=Gold Flash

Color
A=BLACK
B=BEIGE
D=WHITE

Packing

1.General

2.Tape&Reel

3.Tube

4.Tray

5.Other

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:	Pitch 2.0mm Wafer Vertical SMT Type		
			CUSTOMER:	CUSTOMER P/N:	REV:
ANGLE ±2°	DATE	2014/04/01	N/A	N/A	N/A
X.XXX ±0.05	DRAWN	邹丽婷	PART NO.:	DRAWING NO.:	REV:
X.XX ±0.20	CHECKED	于松			
X.X ±0.30	APPROVED	张丰志	SIZE:	UNIT:	SCALE:
X. ±0.50			A4	mm	1:1
					SHEET: 1/1