

CUSTOMER COPY



REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Material:

Contact material:brass

Contact plating: see ordering information

Insulator material:Nylon,UL94V-2

Electrical:

Current rating:1A AC/DC

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$





Voltage rating:100V AC/DC

Withstanding voltage:800V AC/minute

Mechanical:

Temperatures range:-25°C to +85°C

Critical Dimensions:▼

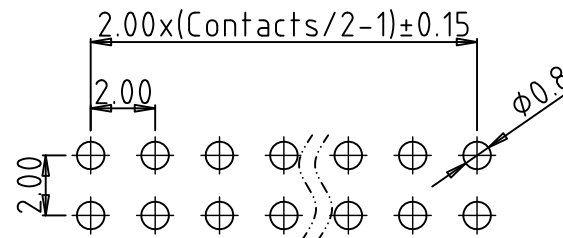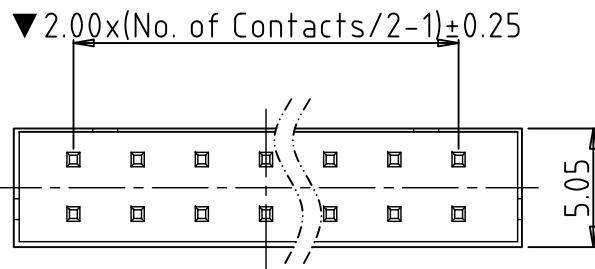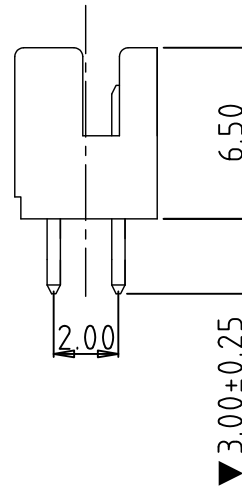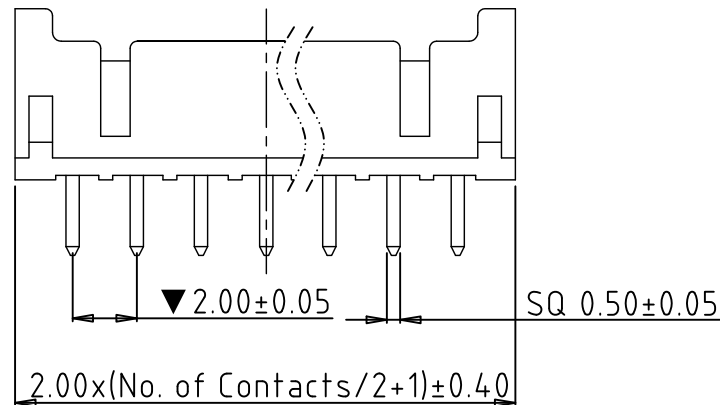

Recommended P.C.B
Layout(± 0.05)

Ordering information

WFA2XX - A XX T 10 X

No. of Pins
2*02-2*20

Contact Plating
01= Tin
02= Gold Flash

Color
A=BLACK
B=GREY
C=BEIGE
D=WHITE

Packing

1.General	√
2.Tape&Reel	
3.Tube	
4.Tray	
5.Other	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE: Pitch 2.00xH6.5 Wafer Dual Row Straight Type,A=3.0		
ANGLE $\pm 2^\circ$	DATE	2013/01/01		
X.XXX ± 0.01	DRAWN	邹丽婷	CUSTOMER:	REV:
X.XX ± 0.25	CHECKED	于松	N/A	N/A
X.X ± 0.35	APPROVED	张丰志	PART NO.:	DRAWING NO.:
X. ± 0.50			WFA2XX-A01T10D	WFA2XX-A01T10D
			SIZE: A4	UNIT: mm
			SCALE: 1:1	SHEET: 1/1