

CUSTOMER COPY

RoHS
compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Material:

Contact material:brass

Contact plating:see ordering information

Solder tab:brass,tin plated over nickel plated

Insulator material:Thermoplastic,UL94V-2

Electrical:

Current rating:2A AC/DC

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$






Voltage rating:250V AC/DC

Withstanding voltage:800V AC/minute

Mechanical:

Temperatures range: -25°C to $+85^{\circ}\text{C}$

Critical Dimensions:▼

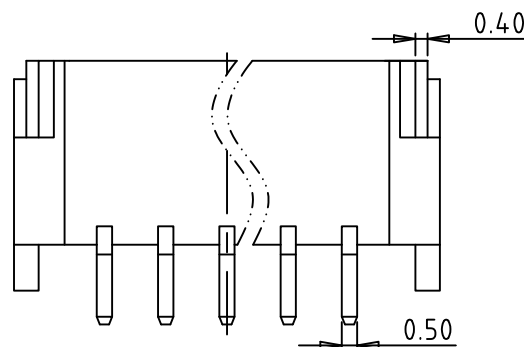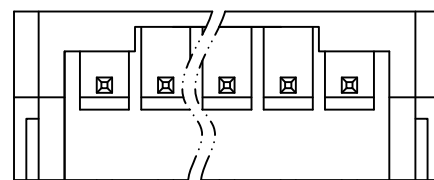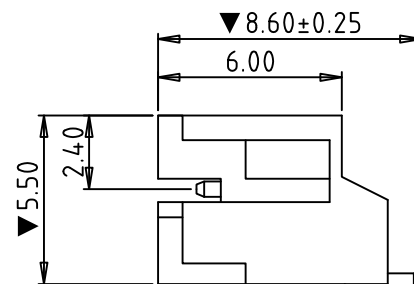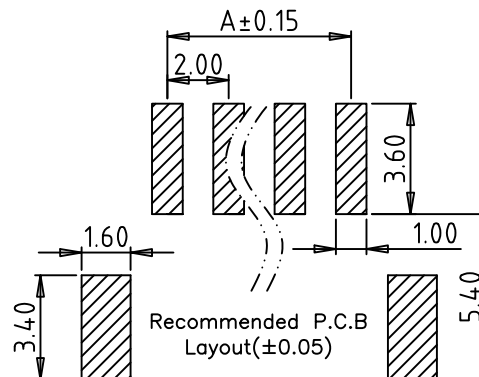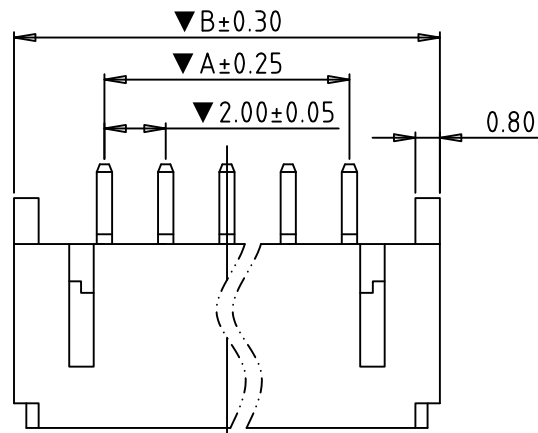

Ordering information

WFD1XX - B XX T 01 X

No. of Pins
02-16

Contact Plating
01=Tin
02=Gold Flash

Color
A=Black
B=Beige
D=White

Packing

1.General

2.Tape&Reel

3.Tube

4.Tray

5.Other

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:

ANGLE $\pm 2^{\circ}$

X.XXX ± 0.05

X.XX ± 0.20

X.X ± 0.30

X. ± 0.50

PROJECTION

DATE

DRAWN

CHECKED

APPROVED

TITLE:

Pitch2.0mm wafer horizontal SMT type

CUSTOMER:

N/A

PART NO.:

WFD1XX-B01T01X

CUSTOMER P/N:

N/A

DRAWING NO.:

WFD1XX-B01T01X

SIZE:

A4

UNIT:

mm

SCALE:

1:1

SHEET:

1/1