

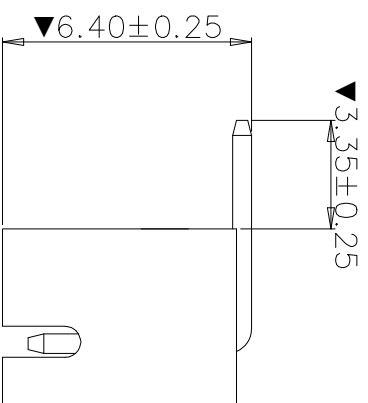
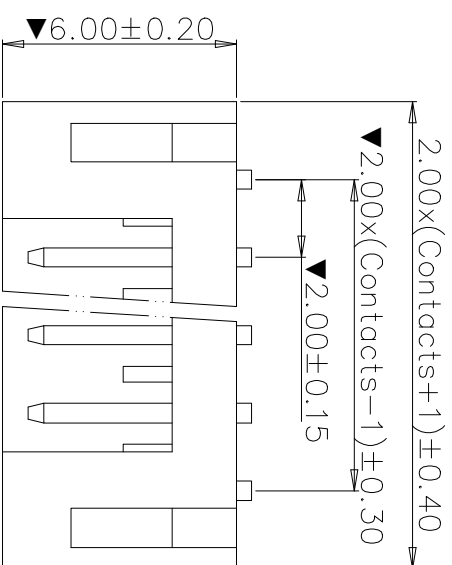


2		1	
REVISION DATA			
SYM	ECN	DESCRIPTION	DATE APPROVED

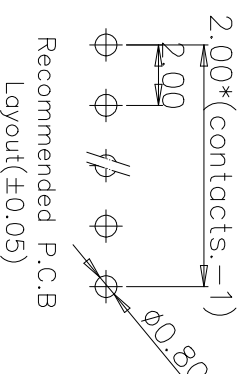

Technical Data
Material:
Contact material:brass
Contact plating:see ordering information
Insulator material:Nylon,UL94V-0
Electrical:
Current rating:2A AC/DC
Contact resistance: $\leq 20\text{m}\Omega$ /contact
Insulation resistance: $\geq 1000\text{M}\Omega$
Voltage rating:100V AC/DC
Withstanding voltage:800V AC/minute
Mechanical:
Temperatures range:-25°C to +85°C
Applicable wire:AWG#24~#32
Critical Dimensions:▼

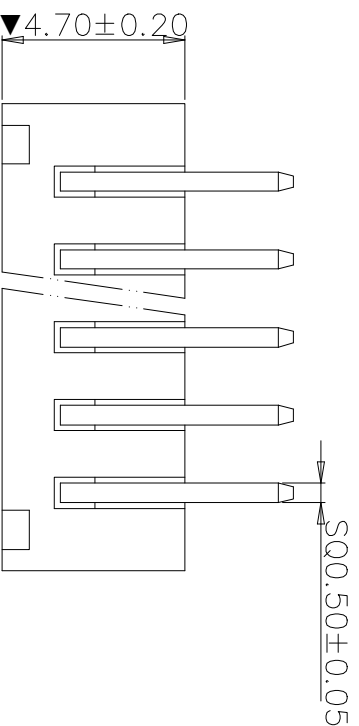

Recommended P.C.B
Layout(± 0.05)


Ordering information

WFB1XX - A XX T 15 X

No. of Pins	Contact Plating	Color
02-16	01=Tin	A=BLACK
	02=Gold	B=GREY
	Flash	C=BEIGE
		D=WHITE

Contact Plating
01= Tin
02= Gold Flash

Color
A=BLACK
B=GREY
C=BEIGE
D=WHITE

Packing		广东纳特康电子股份有限公司										
1.General	√	GUANGDONG NATCONN ELECTRONIC CO.,LTD										
2.Tape&Reel		TOLERANCE:		PROJECTION		TITLE:						
3.Tube		ANGLE ±2°		DATE		2021/08/12				2.0mm Wafer 90° Single Row		
4.Tray		X.XXX ±0.01		DRAWN		CUSTOMER:		N/A		REV		
5.Other	X.	X.XX ±0.25		CHECKED		PART NO.:		DRAWING NO.:		REV		
		X.X ±0.35		APPROVED		SIZE:		UNIT:		SCALE:		
		±0.50		冯显东		A4		mm		5:1		
										SHEET: 1/1		