


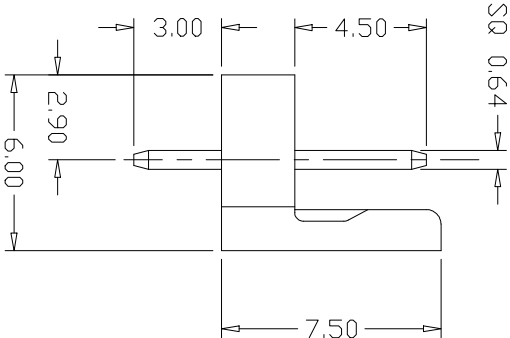


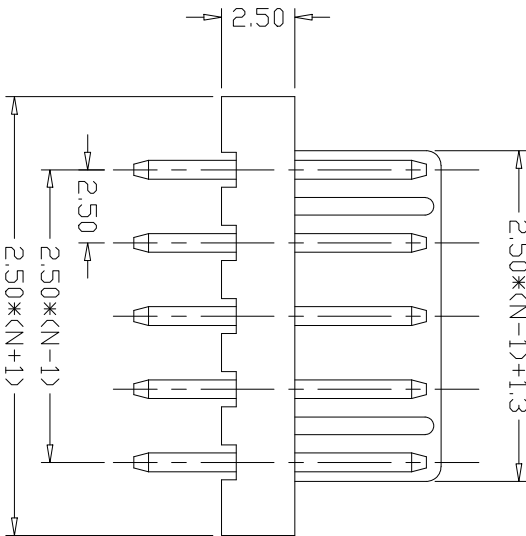

REVISION DATA					
SYM	ECN	DESCRIPTION	DATE	APPROVED	

Specifications
Voltage Rating: 250V(AC,DC)
Current Rating: 2A(AC,DC)
Insulation Resistance: 1000MW Min.
Dielectric Withstanding: 800VAC/minute
Contact Resistance: 20mW Max.
Operating Temperature: -55°C to +105°C

Contact Material: Brass
Contact Plating: Tin Plated
Base Material: Nylon 66, UL 94V-2

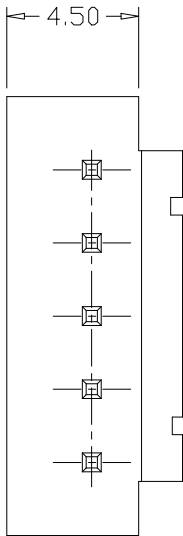

Recommended PCB Hole Layout

Ordering Information

WGA1XX - A XX T 04 X

No. of Pins Contact Plating
01= Tin
02= Gold Flash
COLOR
A= BLACK
D= WHITE
E= CREAM COLORED

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD.

TOLERANCE: ±2°		PROJECTION	TITLE:	2.50mm Pitch Wafer 180°			
ANGLE	±2°	DATE	2012/10/21	CUSTOMER:	N/A	CUSTOMER P/N:	REV:
X.XXX	±0.01	DRAWN	唐建平	PART NO.:		DRAWING NO.:	REV:
X.XX	±0.25	CHECKED	雷邦军	SIZE:	A4	UNIT:	SCALE:
X.X	±0.35	APPROVED	冯显东		mm		1:1
X.	±0.50					SHEET:	1/1