
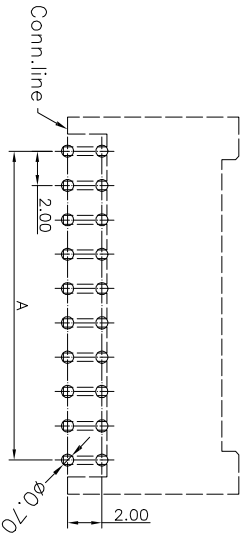




REVISION DATA			
SYM	ECN	DESCRIPTION	DATE
B		据实物 2.50改2.20	2021.04.23 莫健勇
C		按需求 2.2改3.0	2023.9.16 莫健勇

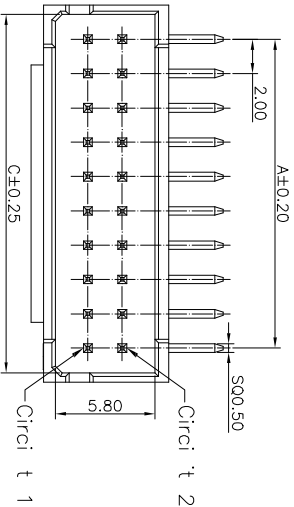

Recommended P.C.B Layout
(General Tolerance:±0.05)

No. of PINS/ROW	Dimension Information		
	A	B	C
02	2.00	6.00	4.90
03	4.00	8.00	6.90
04	6.00	10.00	8.90
05	8.00	12.00	10.90
06	10.00	14.00	12.90
07	12.00	16.00	14.90
08	14.00	18.00	16.90
09	16.00	20.00	18.90
10	18.00	22.00	20.90
11	20.00	24.00	22.90
12	22.00	26.00	24.90
13	24.00	28.00	26.90
14	26.00	30.00	28.90
15	28.00	32.00	30.90
16	30.00	34.00	32.90
17	32.00	36.00	34.90
18	34.00	38.00	36.90
19	36.00	40.00	38.90
20	38.00	42.00	40.90
30	58.00	62.00	60.90

Specifications
Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC
Insulation Resistance: 1000MΩ Min.
Withstanding voltage: 1000V AC/minute
Contact Resistance: 30mΩ Max.
After environmental testing:50mΩ Max.
Operating Temperature:−25℃ to +85℃
Materials
Contact Material: Brass
Insulator Material: Polyester UL94V−0
LCP
All materials must meet Greenconn
requirement for environment protection.

Ordering Information

WFB2XX – A XX T 14 X

No. of Pins Contact Plating COLOR
01=Tin 02=Gold Flash A=BLACK
03=Gold 3u” D=WHITE

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:		PROTECTION		TITLE:	
ANGLE ±2°		DATE	2020/3/2	2.00mm Pitch Wfer 90°	
X.XXX ±0.01		DRAWN		CUSTOMER P/N:	REV: N/A
X.XX ±0.15		CHECKED		PART NO.:	DRAWING NO.: WFB2XX-AXXT14X
X.X ±0.25		APPROVED		SIZE: A4	UNIT: mm
X. ±0.50				SCALE: 1:1	SHEET: 1/1