

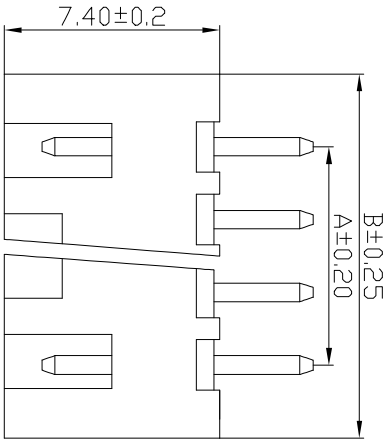


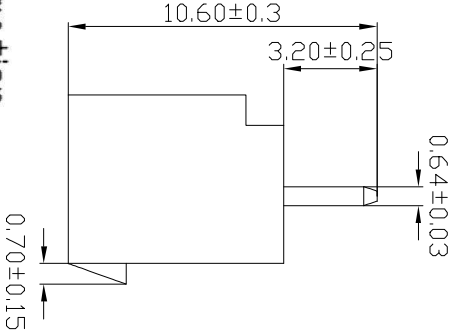

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

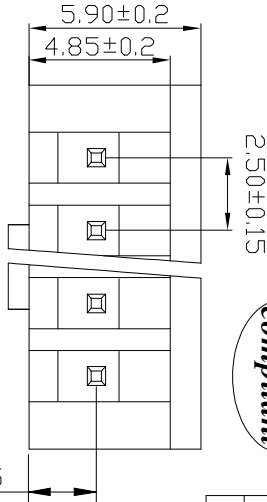

注：所用物料均符合ROHS2.0

Dimensional & Ordering Information

poles	2-16 poles
Pitch between ploes	2.5mm
Rated Voltage	250V AC,DC
Rated current	3.0A
Withstand Voltage	1000V.AC/minute
Insulation Resistance	≥1000 MΩ
Temperaure Range	-25℃~+85℃
Applicable Wire	AWG#22~#28
Material	Fire Resistance Nylon

16	HAA250A-16	31.5	42.7
15	HAA250A-15	35.0	40.2
14	HAA250A-14	32.5	37.7
13	HAA250A-13	30.0	35.2
12	HAA250A-12	27.5	32.7
11	HAA250A-11	25.0	30.2
10	HAA250A-10	22.5	27.7
9	HAA250A-9	20.0	25.2
8	HAA250A-8	17.5	22.7
7	HAA250A-7	15.0	20.2
6	HAA250A-6	12.5	17.7
5	HAA250A-5	10.0	15.2
4	HAA250A-4	7.5	12.7
3	HAA250A-3	5.0	10.2
2	HAA250A-2	2.5	7.7

2Y-8Y	9Y-16Y
A±0.20	A±0.40
B±0.25	B±0.45

Circuits	90°	
	Part No.	Dimension(mm)

natconn®广东纳特康电子股份有限公司

GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°		PROJECTION		TITLE:	
X.XXX ±0.01	DATE	2014/11/25		XH-nA直针带锁	
X.XX ±0.25	DRAWN	唐建平			
X.X ±0.35	CHECKED				
X. ±0.50	APPROVED				
		CUSTOMER:	N/A	CUSTOMER P/N:	N/A
		PART NO.:		DRAWING NO.:	HAA250A-1
		SIZE:	A4	UNIT:	mm
		SCALE:	1:1	SHEET:	1/1