

CUSTOMER COPY

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

RoHS
compliant展开
示图

Specifications

Voltage Rating: 250V(AC,DC)

Current Rating: 2A(AC,DC)

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 800VAC/minute


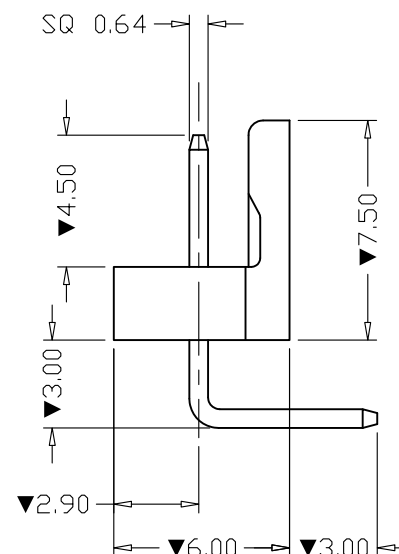
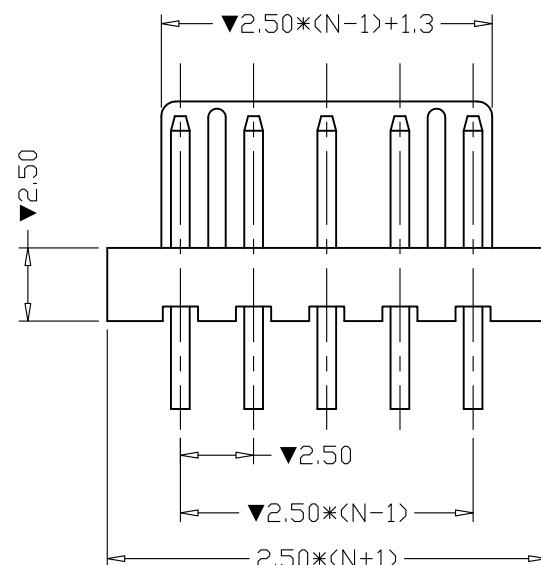
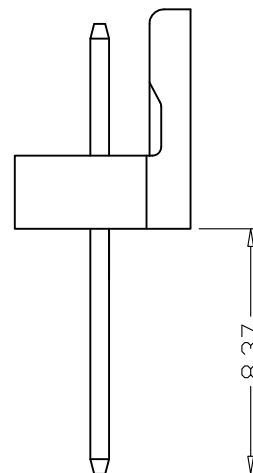
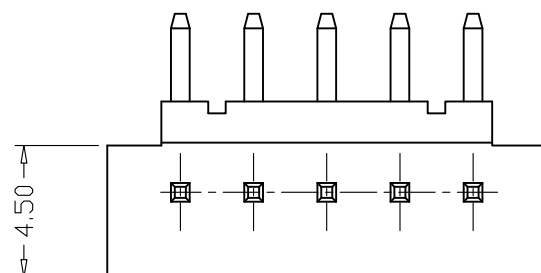
Contact Resistance: 20mΩ Max.

Operating Temperature: -55°C to +105°C

Contact Material: Brass

Contact Plating: Tin Plated

Base Material: Nylon 66, UL 94V-0

Critical Dimensions : ▼
L=15.4

Recommended PCB Hole Layout

Ordering Information

WGB1XX - A XX T 04 X

No. of Pins

Contact Plating
01=Tin
02=Gold FlashCOLOR
A=BLACK
D=WHITE
E=CREAM COLOREDnatconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD.

TOLERANCE:	PROJECTION		TITLE:		
ANGLE ±2°	DATE	2012/10/21	2.50mm Pitch Wafer 90°		
X.XXX ±0.01	DRAWN	江国注	CUSTOMER:	CUSTOMER P/N:	REV:
X.XX ±0.25	CHECKED	雷邦军	N/A	N/A	N/A
X.X ±0.35	APPROVED	冯显东	PART NO.:	DRAWING NO.:	REV:
X. ±0.50				WGB1XX-A01T04E	A
			SIZE:	UNIT:	SCALE:
			A4	mm	1:1
					SHEET:
					1/1