

CUSTOMER COPY

RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

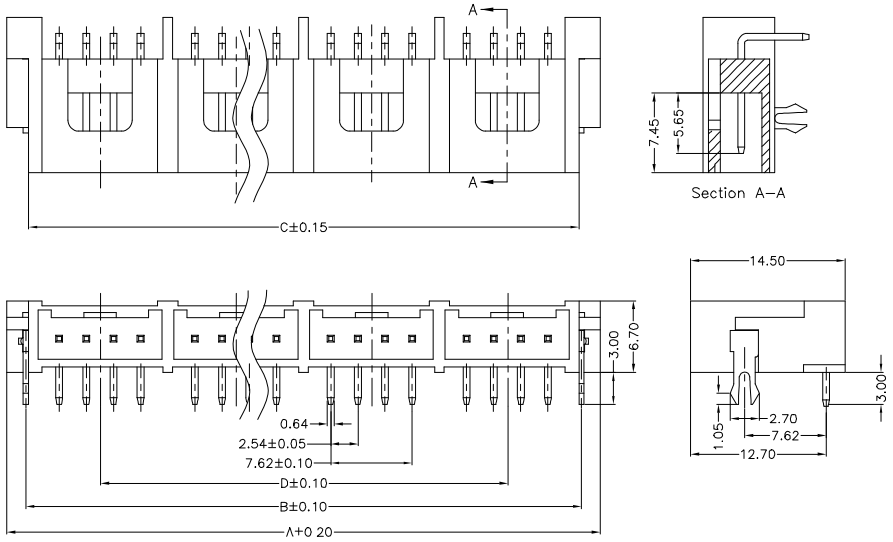

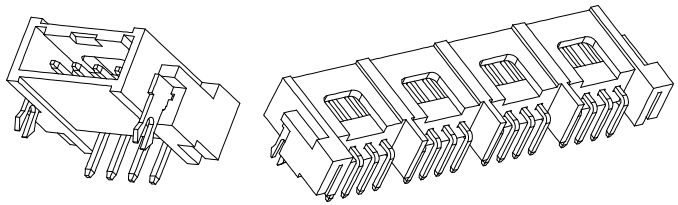


Specifications:
Current Rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m Ohm Max
Insulation Resistance:1000M Ohm Min.
Withstanding Voltage:1000V AC/Minute
Operating Temperature Range:-40°C To +105°C

Material and Finish:
Insulator:Nylon 66 (UL94V-0)
Insulator Color:Black
Contact:Brass
Plating:Tin Plated

Pin Dimension:

Pin	A	B	C	D
4	17.40	13.90	13.40	
8	30.10	26.60	26.10	12.70
12	42.80	39.30	38.80	25.40
16	55.50	52.00	51.50	38.10
24	80.90	77.40	76.90	63.50
32	106.30	102.80	102.30	88.90

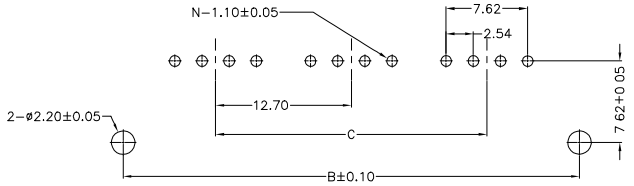

PCB Layout

Ordering Information

WHB1XX - A XX T 17 X

- XX: No. of Pins
- XX: Contact Plating — 01=Tin, 02=Gold Flash
- X: COLOR — A=BLACK, D=WHITE

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION		TITLE: 2.54mm Pitch Wafer 90°			
ANGLE ±2°	DATE	2013/09/10				
X.XXX ±0.01	DRAWN	唐建平	CUSTOMER: N/A		CUSTOMER P/N: N/A	REV: N/A
X.XX ±0.25	CHECKED	雷邦军	PART NO.:		DRAWING NO.: WHB1-AT17X	REV: A
X.X ±0.35	APPROVED	冯显东	SIZE: A4	UNIT: mm	SCALE: 1:1	SHEET: 1/1
X. ±0.50						