




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
B		按实物修改图纸颜色	2024.12.5	ZSP

SPECIFICATIONS

1. Current rating: 15A
2. Voltage rating: 600V AC / DC
3. Temperature range: -25°C ~ +85°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 5000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material:

Insulator Material:Nylon66, UL94V-0 Black
Contact Material:Phosphor Bronze or Brass
Contact Area Plating: Plated Tin or Plated GoldMate

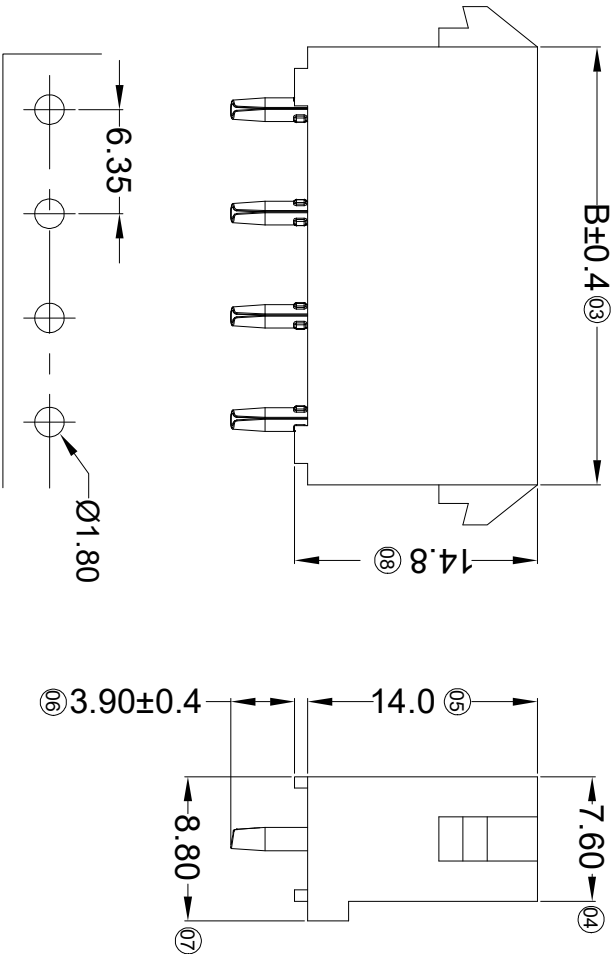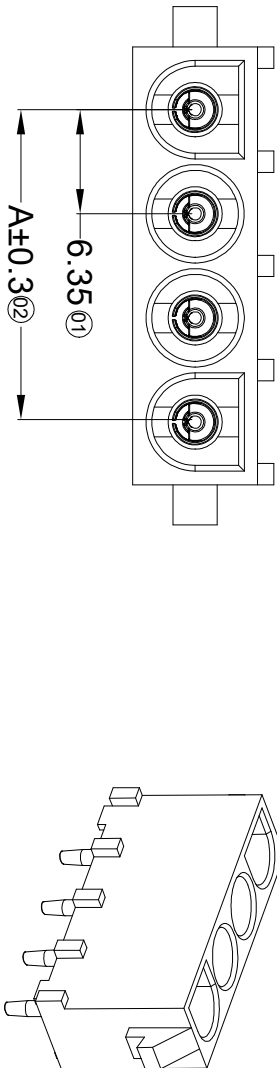

TYPE 1

Recommended P.C.B Layout
General Tolerance±0.05

305

-

WA

XX

X

B

M

117

No. of Positions
00-99

Plating Option
A Au3μ"
B Au3μ"
C Au10μ"
D Gf/50μ"
S Sn120μ"
Z Special

Insulator Material
Option
A PBT
B PA66
C PA6T
D PA6
E PPS
F LCP
G PA6T
H PC
Z Special

Type Option
M MALE

Serial NO.
001-999

Packing		✓	
1.General		TOLERANCE: ANGLE ±2°	
2. Reel		PROJECTION	DATE
3. Tube			2024/11/1
4. Tray		DRAWN	郑双平
5.Other		CHECKED	
		APPROVED	
		TITLE: 6.35mm Crimp Style Connectors	
		CUSTOMER:	CUSTOMER PN:
		PART NO.:	DRAWING NO.:
		SIZE: A4	SCALE: 1:1
		UNIT: mm	SHEET: 1/1

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

Poles	Dimensions(mm)	
	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77