

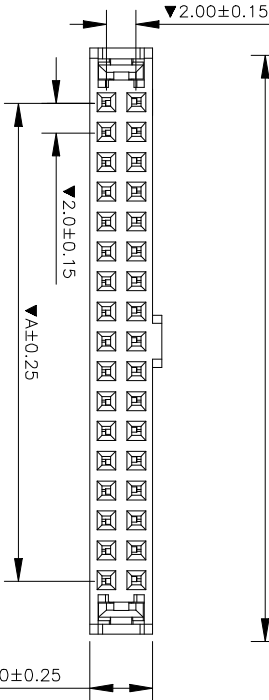
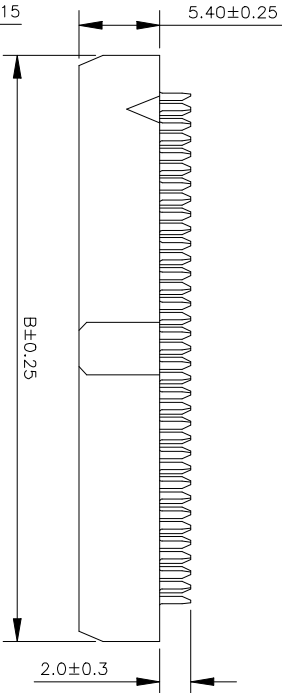






REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Material:
Insulator: PBT+30%G.F black UL94-V0
Contact: brass.
Plated: gold plated on contact area, all over nickel plated
Specification:
Current Rating: 1 Amp.
Voltage Rating: 250V AC/DC
Withstanding Voltage: AC 500V for 1 minute.
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C ~ +105°C.
Critical Dimensions : ▼

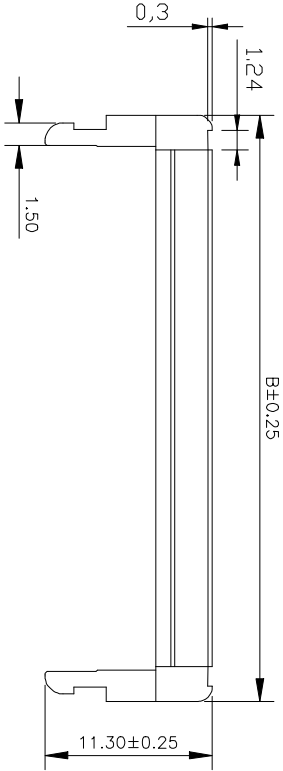

table

Poles	Dim A	Dim B	Poles	Dim A	Dim B
8P	6.0	13.2	26P	24.0	31.2
10P	8.0	15.2	28P	26.0	33.2
12P	10.0	17.2	30P	28.0	35.2
14P	12.0	19.2	34P	32.0	39.2
16P	14.0	21.2	36P	34.0	41.2
18P	16.0	23.2	40P	38.0	45.2
20P	18.0	25.2	44P	42.0	49.2
22P	20.0	27.2	50P	48.0	55.2
24P	22.0	29.2	56P	54.0	61.2

Ordering information

IDC - 200 - XX -1

No. of positions
08~56
(see table)

Contact Plating
2 Gold/Flo
3 Gold/Tin
4 Au5μ
5 Au15μ

Packing	
1.General	
2.Tape&Reel	
3.Tube	
4.Tray	√
5.Other	X.

natconn®

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°		PROJECTION		TITLE: 2.00mm IDC Connector Single Contact/With Nose Type	
DATE	2014/06/25	DRAWN	邹丽婷	CUSTOMER: N/A	CUSTOMER P/N: N/A
CHECKED	X.XX ±0.25	CHECKED	于松	PART NO.:	DRAWING NO.: IDC-200-XX-1
APPROVED	X.X ±0.35	APPROVED	张丰志	SIZE: A4	UNIT: mm
	±0.50			SCALE: 1:1	SHEET: 1/1