

CUSTOMER COPY


RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

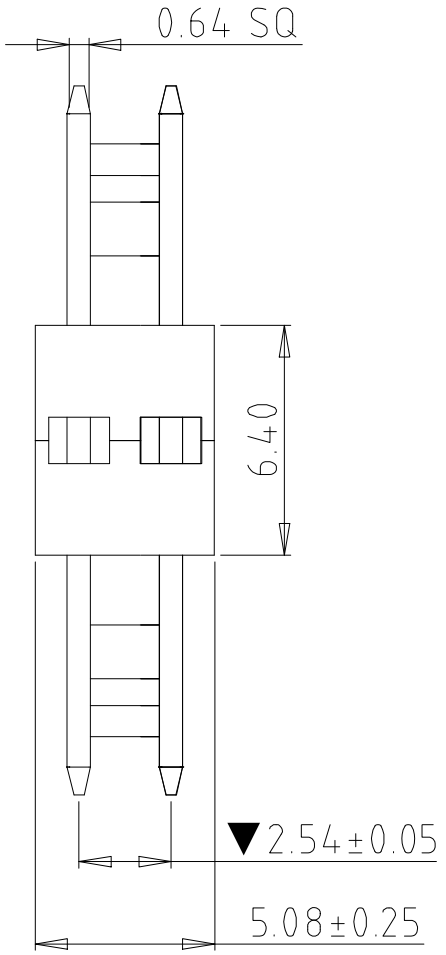

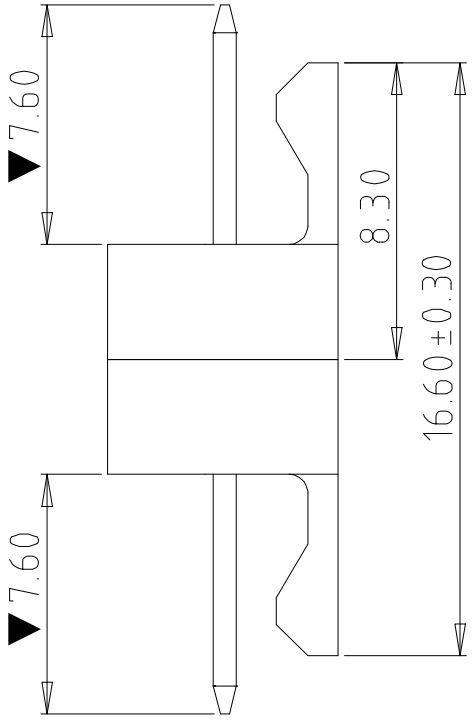

Technical Data
1.Material:
1.1 Contact:brass,tin plating
1.2 Insulator:PA66,UL94V-0,RoHS
2.Electrical:
2.1 Current rating:1A/contact AC,DC max.
2.2 Voltage rating:250V AC,DC
2.3 Contact resistance: ≤10mΩ/contact
2.4 Insulation resistance: ≥1000MΩ at V=100V
2.5 Dielectric strength:1000V/min.
3.Mechanical:
3.1 Operaing temperature: -40°C to+105°C
4.Critical Dimensions:▼

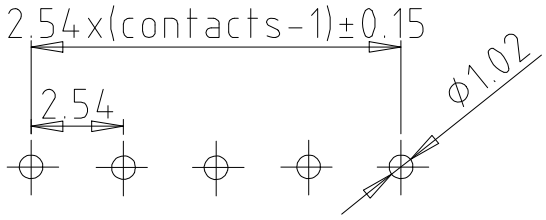

Recommended P.C.Board
Hole Layout

Ordering Information

WHA102 – A XX T 10 X

- WHA102: No. of Pins
- A XX: Contact Plating
  - 01=Tin
  - 02=Gold Flash
- T: Packing
- 10: Pitch 2.54mm
- X: COLOR
  - A=BLACK
  - D=WHITE

Packing	
1.General	√
2.Tape&Reel	
3.Tube	
4.Tray	
5.Other	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION		TITLE: Pitch2.54 Wafer Straight Type, A=B=7.6mm			
ANGLE ±2°	DATE	2011/05/19				
X.XXX ±0.05	DRAWN	唐建平	CUSTOMER: N/A	CUSTOMER P/N: N/A		REV: N/A
X.XX ±0.25	CHECKED	雷邦军	PART NO.:	DRAWING NO.: WHA1XX-AXXT10X		REV: A
X.X ±0.35	APPROVED	冯显东	SIZE: A4	UNIT: mm	SCALE: 1:1	SHEET: 1/1
X. ±0.50						