


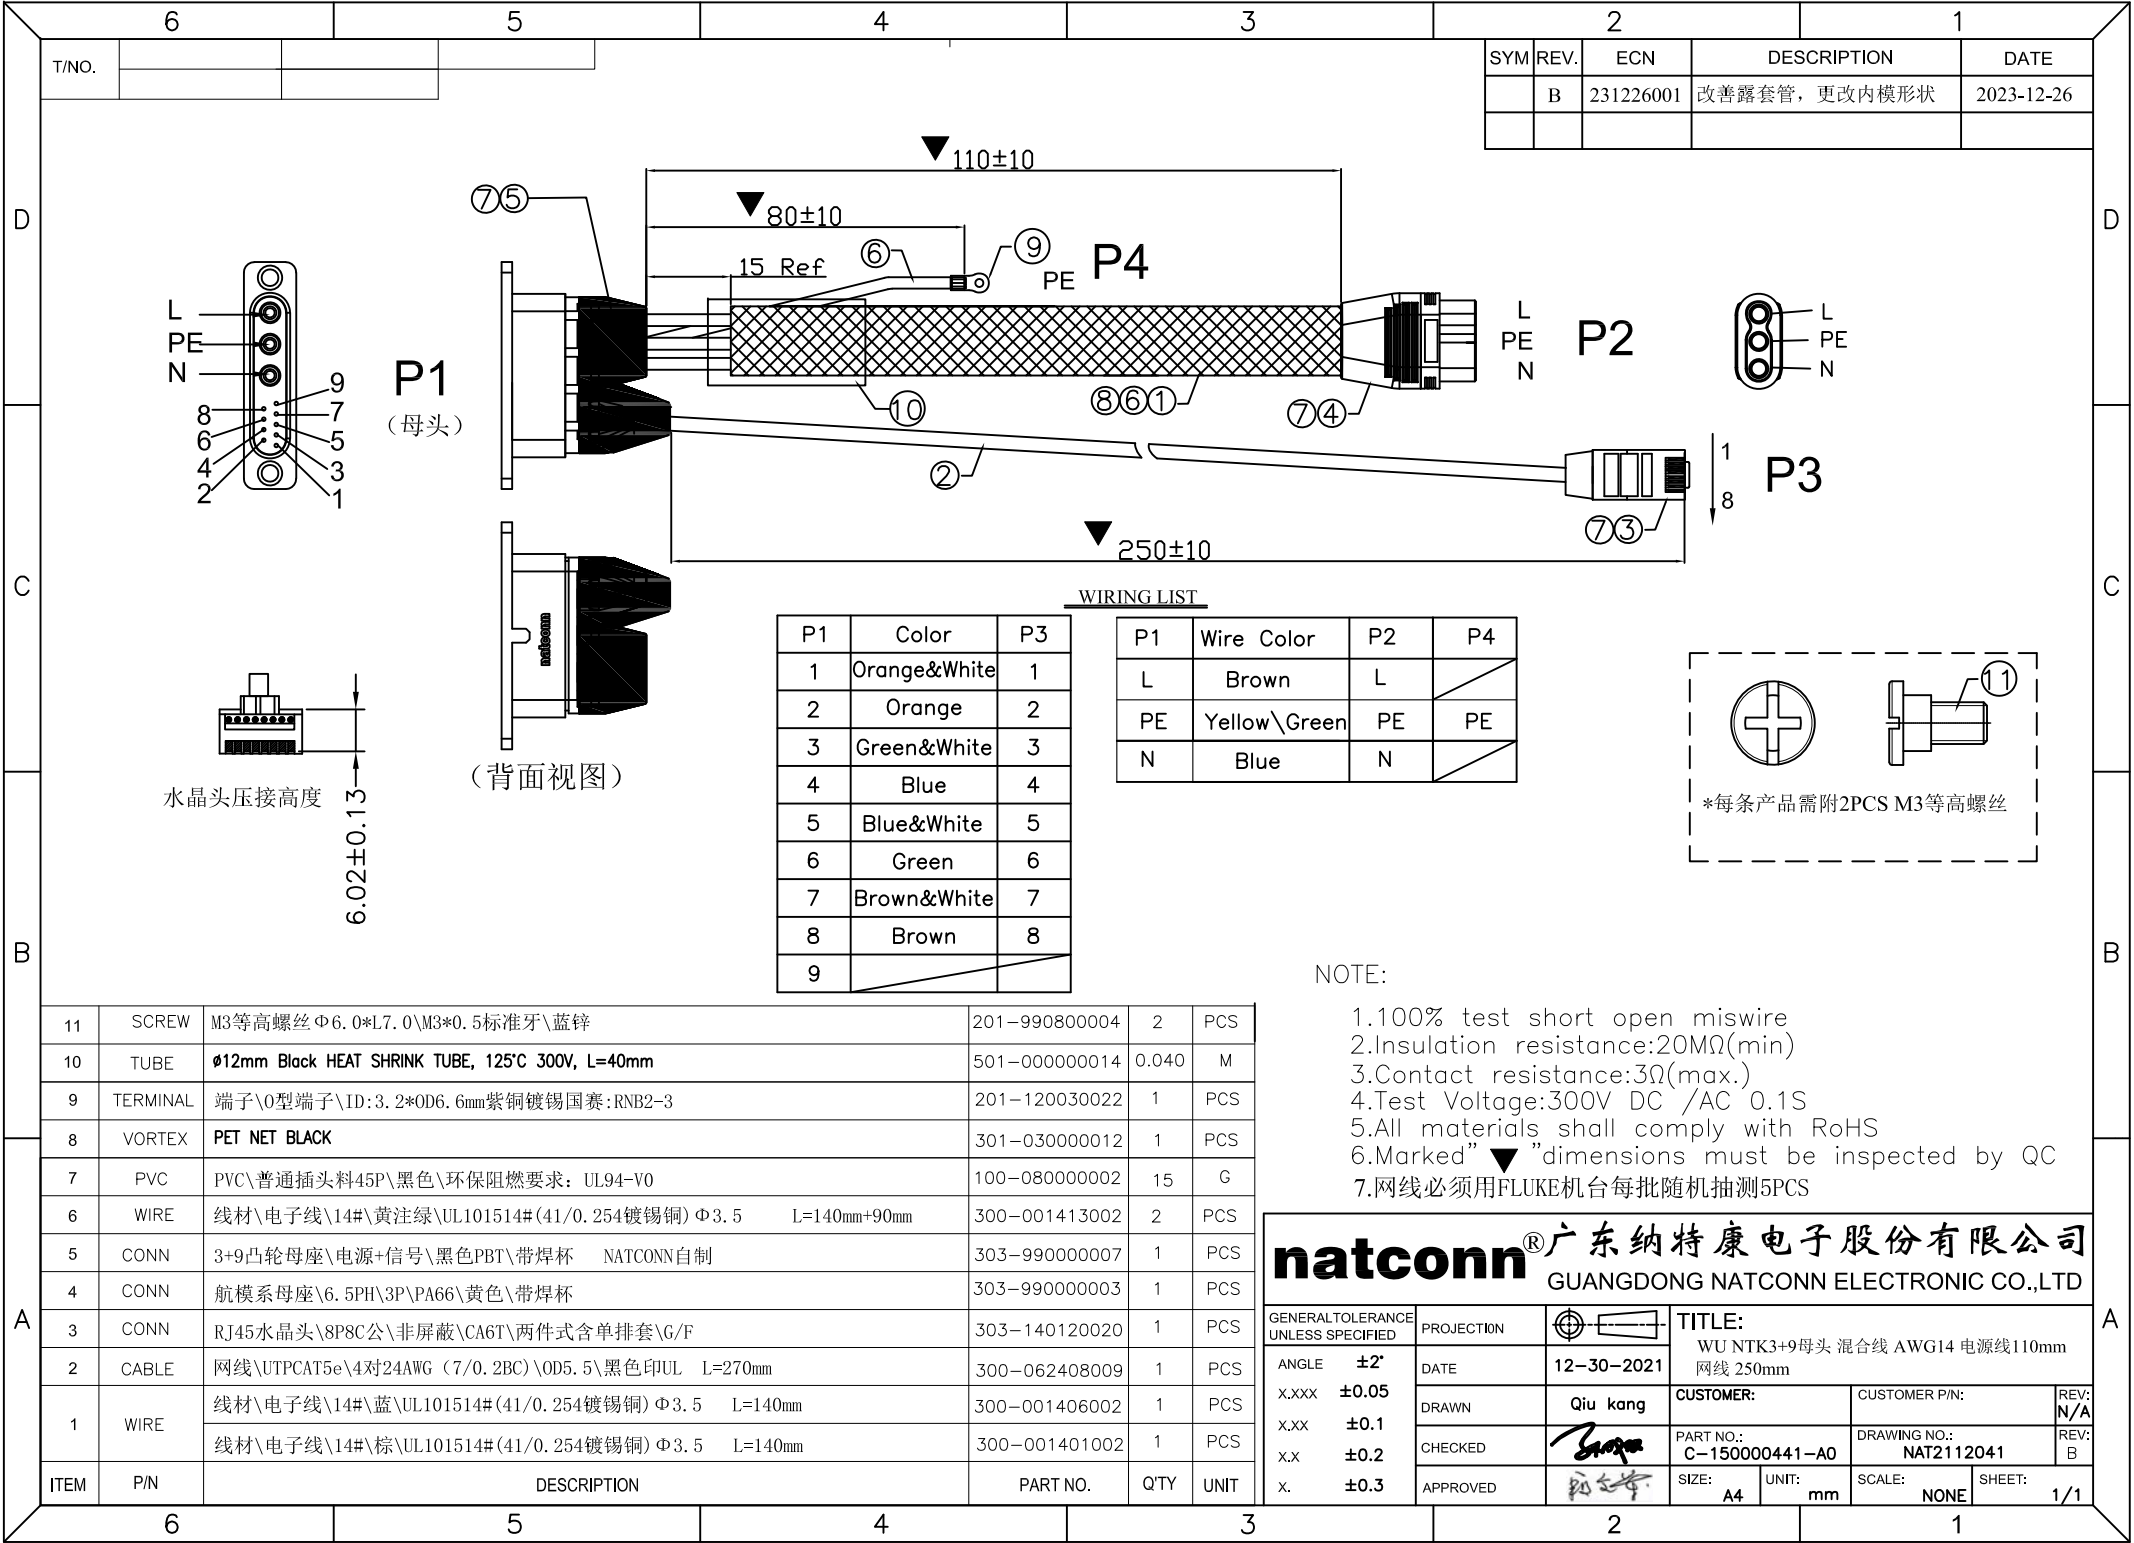

SYM	REV.	ECN	DESCRIPTION	DATE
	B	231226001	改善露套管，更改内模形状	2023-12-26

WIRING LIST

P1	Color	P3
1	Orange&White	1
2	Orange	2
3	Green&White	3
4	Blue	4
5	Blue&White	5
6	Green	6
7	Brown&White	7
8	Brown	8
9		

P1	Wire Color	P2	P4
L	Brown	L	
PE	Yellow\Green	PE	PE
N	Blue	N	

*每条产品需附2PCS M3等高螺丝

- NOTE:
- 1.100% test short open miswire
 - 2.Insulation resistance:20MΩ(min)
 - 3.Contact resistance:3Ω(max.)
 - 4.Test Voltage:300V DC /AC 0.1S
 - 5.All materials shall comply with RoHS
 - 6.Marked"▼"dimensions must be inspected by QC
 - 7.网线必须用FLUKE机台每批随机抽测5PCS

11	SCREW	M3等高螺丝 Φ6.0* $L7.0$ \M3*0.5标准牙\蓝锌	201-990800004	2	PCS
10	TUBE	Φ12mm Black HEAT SHRINK TUBE, 125°C 300V, L=40mm	501-000000014	0.040	M
9	TERMINAL	端子\0型端子\ID:3.2*OD6.6mm紫铜镀锡国赛:RNB2-3	201-120030022	1	PCS
8	VORTEX	PET NET BLACK	301-030000012	1	PCS
7	PVC	PVC\普通插头料45P\黑色\环保阻燃要求: UL94-V0	100-080000002	15	G
6	WIRE	线材\电子线\14#\黄注绿\UL101514#(41/0.254镀锡铜) Φ3.5 L=140mm+90mm	300-001413002	2	PCS
5	CONN	3+9凸轮母座\电源+信号\黑色PBT\带焊杯 NATCONN自制	303-990000007	1	PCS
4	CONN	航模系母座\6.5PH\3P\PA66\黄色\带焊杯	303-990000003	1	PCS
3	CONN	RJ45水晶头\8P8C公\非屏蔽\CA6T\两件式含单排套\G/F	303-140120020	1	PCS
2	CABLE	网线\UTPCAT5e\4对24AWG (7/0.2BC)\OD5.5\黑色印UL L=270mm	300-062408009	1	PCS
1	WIRE	线材\电子线\14#\蓝\UL101514#(41/0.254镀锡铜) Φ3.5 L=140mm	300-001406002	1	PCS
		线材\电子线\14#\棕\UL101514#(41/0.254镀锡铜) Φ3.5 L=140mm	300-001401002	1	PCS
ITEM	P/N	DESCRIPTION	PART NO.	Q'TY	UNIT

natconn®广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

GENERAL TOLERANCE UNLESS SPECIFIED	PROJECTION	TITLE: WU NTK3+9母头 混合线 AWG14 电源线110mm 网线 250mm		
ANGLE ±2°	DATE	12-30-2021		
X.XXX ±0.05	DRAWN	Qiu kang	CUSTOMER:	CUSTOMER P/N:
X.XX ±0.1	CHECKED		PART NO.: C-150000441-A0	DRAWING NO.: NAT2112041
X.X ±0.2	APPROVED		SIZE: A4	UNIT: mm
X. ±0.3			SCALE: NONE	SHEET: 1/1